

A Cost-Benefit Assessment of Gasification-Based Biorefining in the Kraft Pulp and Paper Industry

Volume 3: Fuel Chain and National Cost-Benefit Analysis

FINAL REPORT

Under contract DE-FC26-04NT42260 with the U.S. Department of Energy
and with cost-sharing by the American Forest and Paper Association

21 December 2006

Eric D. Larson
Princeton Environmental Institute
Princeton University
Princeton, NJ
elarson@princeton.edu

Princeton University

Stefano Consonni
Department of Energy Engineering
Politecnico di Milano
Milan, Italy
stefano.consonni@polimi.it



Ryan E. Katofsky and Matthew Campbell
Navigant Consulting, Inc.
Burlington, MA
rkatofsky@navigantconsulting.com
macampbell@navigantconsulting.com

NAVIGANT
CONSULTING

Kristiina Iisa and W. James Frederick, Jr.
Institute of Paper Science and Technology
School of Chemical and Biomolecular Engineering
Georgia Institute of Technology
Atlanta, GA
Kristiina.Iisa@ipst.gatech.edu
Jim.Frederick@ipst.gatech.edu

Georgia Institute
of **Technology**

“Navigant” is a service mark of Navigant International, Inc. Navigant Consulting, Inc. (NCI) is not affiliated, associated, or in any way connected with Navigant International, Inc. and NCI’s use of “Navigant” is made under license from Navigant International, Inc.

TABLE OF CONTENTS

1	INTRODUCTION.....	1
2	EMISSIONS FACTORS FOR STATIONARY SOURCES.....	1
3	EMISSIONS FACTORS FOR BIOFUEL FUEL CHAIN ELEMENTS	4
4	EMISSIONS FACTORS FOR CONVENTIONAL FUEL CHAINS	13
5	ANNUAL EMISSIONS ESTIMATE PER MILL IN 2010.....	14
6	RESULTS FROM THE MARKET PENETRATION ANALYSIS.....	18
7	REFERENCES.....	32

List of Tables in Volume 3

Table 1. Unit emission factors assumed for the New Tomlinson case (lb/MMBtu fuel input - HHV).....	2
Table 2. Unit emission factors assumed for the Mill-Scale High-Temperature BLGCC case (lb/MMBtu fuel input - HHV)	2
Table 3. Unit emission factors assumed for the DMEa case (lb/MMBtu fuel input - HHV).....	2
Table 4. Unit emission factors assumed for the DMEb case (lb/MMBtu fuel input - HHV)	3
Table 5. Unit emission factors assumed for the DMEc case (lb/MMBtu fuel input - HHV).....	3
Table 6. Unit emission factors assumed for the FTa case (lb/MMBtu fuel input - HHV).....	3
Table 7. Unit emission factors assumed for the FTb case (lb/MMBtu fuel input - HHV).....	3
Table 8. Unit emission factors assumed for the FTc case (lb/MMBtu fuel input - HHV).....	4
Table 9. Unit emission factors assumed for the mixed alcohols (MA) case (lb/MMBtu fuel input - HHV).	4
Table 10: Total average U.S. grid emissions (including non-fossil fuel sources) assumed in estimating grid offsets. ^a	4
Table 11. Emissions and energy use ^a from biomass collection and transport (75-miles one-way)	5
Table 12. Emissions and energy use ^a from DME transportation and distribution	5
Table 13. Emissions and energy use ^a from FT Gasoline transportation and distribution	6
Table 14. Emissions and energy use ^a from FT Diesel transportation and distribution	7
Table 15. Emissions and energy use ^a from mixed alcohol transportation and distribution	8
Table 16. Emissions and energy use ^a from FT Crude transportation and distribution.....	9
Table 17. Emissions and energy use ^a from FT Crude refining	10
Table 18. Energy consumption and emissions assumptions for DME in light-duty vehicles (CIDI Engines) ^a	10
Table 19. Energy consumption and emissions assumptions for FT fuels blended with conventional fuels in light-duty vehicles (FT gasoline in gasoline engines and FT diesel in CIDI engines) ^a	11
Table 20. Energy consumption and emissions assumptions for FT fuels in light-duty vehicles (FT gasoline in gasoline engines and FT diesel in CIDI engines). ^a	11
Table 21. Energy consumption and emissions assumptions for mixed alcohol use in light-duty vehicles (low-level blend with gasoline and Flexible-Fuel Vehicle ["E-85"]) ^a	12
Table 22. Energy consumption ^a and emissions for the gasoline fuel chain	13
Table 23. Energy consumption ^a and emissions for the low-sulfur diesel fuel chain	13
Table 24: Summary of Biorefinery market penetration scenarios developed in this study.....	18

List of Figures in Volume 3

Figure 1: Well-to-wheels analysis framework for pulp and paper biorefineries.....	1
Figure 2: CO ₂ emissions in year 2010, short tons per mill per year	14
Figure 3: SO ₂ emissions in year 2010, short tons per mill per year.....	15
Figure 4: NO _x emissions in year 2010, short tons per mill per year	15
Figure 5: VOC emissions in year 2010, short tons per mill per year.....	16
Figure 6: CO Emissions in year 2010, short tons per mill per year	16
Figure 7: PM10 Emissions in year 2010, short tons per mill per year.....	17
Figure 8: TRS Emissions in year 2010, short tons per mill per year	17
Figure 9: Market penetration estimates used to assess energy and environmental impacts of biorefinery implementation in the United States.	19
Figure 10: Net fossil fuel energy savings – HHV (<i>Aggressive</i> market penetration scenario).....	19
Figure 11: Net fossil fuel energy savings – HHV (<i>Base</i> market penetration scenario)	20
Figure 12: Net fossil fuel energy savings – HHV (<i>Low</i> market penetration scenario)	20
Figure 13: Net CO ₂ emissions reductions (with credit for biomass CO ₂) (<i>Aggressive</i> market penetration scenario)..	21
Figure 14: Net CO ₂ emissions reductions (with credit for biomass CO ₂) (<i>Base</i> market penetration scenario)	21
Figure 15: Net CO ₂ emissions reductions (with credit for biomass CO ₂) (<i>Low</i> market penetration scenario)	22
Figure 16: Net SO ₂ emissions reductions (<i>Aggressive</i> market penetration scenario)	22
Figure 17: Net SO ₂ emissions reductions (<i>Base</i> market penetration scenario).....	23
Figure 18: Net SO ₂ emissions reductions (<i>Low</i> market penetration scenario).....	23
Figure 19: Net NO _x emissions reductions (<i>Aggressive</i> market penetration scenario).....	24
Figure 20: Net NO _x emissions reductions (<i>Base</i> market penetration scenario).....	24
Figure 21: Net NO _x emissions reductions (<i>Low</i> market penetration scenario)	25
Figure 22: Net VOC emissions reductions (<i>Aggressive</i> market penetration scenario)	25
Figure 23: Net VOC emissions reductions (<i>Base</i> market penetration scenario).....	26
Figure 24: Net VOC emissions reductions (<i>Low</i> market penetration scenario).....	26
Figure 25: Net CO emissions reductions (<i>Aggressive</i> market penetration scenario).....	27
Figure 26: Net CO emissions reductions (<i>Base</i> market penetration scenario).....	27
Figure 27: Net CO emissions reductions (<i>Low</i> market penetration scenario).....	28
Figure 28: Net PM10 emissions reductions (<i>Aggressive</i> market penetration scenario).....	28
Figure 29: PM10 emissions reductions (<i>Base</i> market penetration scenario)	29
Figure 30: PM10 emissions reductions (<i>Low</i> market penetration scenario)	29
Figure 31: Net VOC emissions reductions comparing low-level and high-level blends of mixed alcohols and FT biofuels (<i>Aggressive</i> market penetration scenario)	30
Figure 32: Net CO emissions reductions comparing low-level and high-level blends of mixed alcohols and FT biofuels (<i>Aggressive</i> market penetration scenario)	31

1 Introduction

This volume contains the detailed assumptions for the well-to-wheels (WTW) analysis and provides complete results of the national impacts analysis for all three market penetration scenarios. Figure 1 illustrates the components modeled in the WTW analysis. This volume is primarily a data volume. The reader is referred back to Volume 1 for a more complete discussion of the WTW approach and a description of the market penetration scenarios.

Note that the analysis, based on the assumptions presented here, is not intended to serve as a complete lifecycle analysis of biorefinery emissions. Rather the estimates provide indicative results of the potential impacts of biorefinery options relative to “business as usual” in the pulp and paper industry.

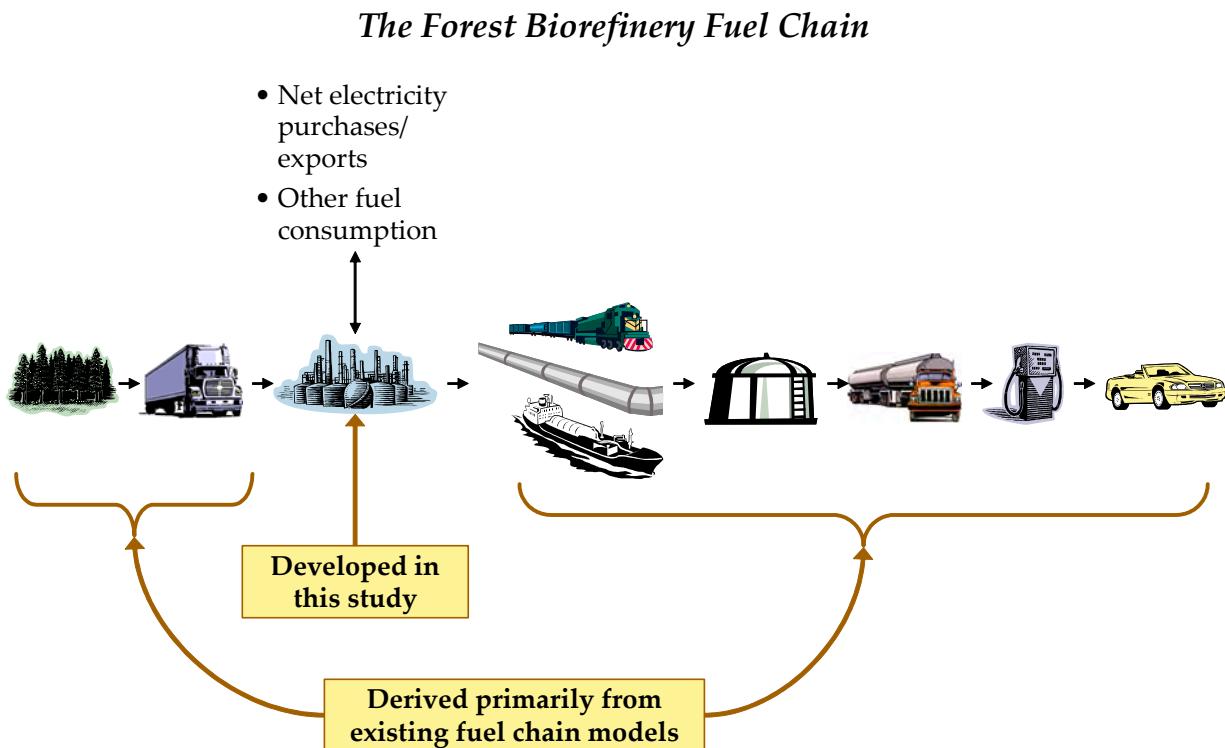


Figure 1: Well-to-wheels analysis framework for pulp and paper biorefineries

2 Emissions Factors for Stationary Sources

Table 1 through Table 9 show the emissions factors used for the point sources at the reference pulp and paper mill, expressed on a common basis for each of the configurations. All values are based on the higher heating value of the fuel. The primary energy represents the energy contained in the fuel consumed in the indicated step, e.g., black liquor in the case of the Tomlinson boilers and syngas in the case of the gas turbines. In the case of the gas turbine

systems and the duct burners, the primary energy is a mixture of biomass syngas, unconverted syngas from biofuels synthesis, and natural gas (BLGCC configuration only), depending on the configuration. For this reason, CO₂ and SO₂ emissions rates differ among different cases. All other emissions are assumed to be the same. For the lime kiln, emissions are based on the use of #6 fuel oil. Because of the reactions taking place inside a lime kiln, emissions of criteria pollutants from burning #6 oil are not substantially different from emissions using natural gas. The CO₂ emissions shown in Table 1 through Table 9 include CO₂ from biomass. This CO₂ is netted out in the fuel chain analysis, as described in Volume 1.

Emissions factor estimates for mill related sources are based on the following references:

- Lime kiln and Tomlinson boiler: [1, 2, 3, 4, 5, 6, 7]
- Bark boiler: [8]
- Gas turbine: [9, 10, 11, 12, 13, 14, 15, 16]
- Duct burner: [17], assuming similar criteria pollutant emissions as for natural gas combustion.

Table 10 shows grid power emissions for 2010-2035 in five-year increments. Emissions in the intervening years are consistent with the trends indicated by the years shown.

Table 1. Unit emission factors assumed for the New Tomlinson case (lb/MMBtu fuel input - HHV)

	Lime kiln	Bark boiler	Tomlinson
VOC	0.0043	0.0130	0.0134
CO	0.0285	0.6000	0.0940
NOx	0.2857	0.2200	0.1544
PM10	0.0150	0.0540	0.0477
SOx	0.0286	0.0698	0.0215
CO2	172	213	205
TRS	0.0086	0.0000	0.0034

Table 2. Unit emission factors assumed for the Mill-Scale High-Temperature BLGCC case (lb/MMBtu fuel input - HHV)

	Lime kiln	Bark boiler	GT	Duct burner
VOC	0.0043	0.0130	0.0021	0.0054
CO	0.0285	0.6000	0.0330	0.0818
NOx	0.2857	0.2200	0.0897	0.0974
PM10	0.0150	0.0540	0.0066	0.0074
SOx	0.0286	0.0698	0.0000	0.0004
CO2	172	213	221	169
TRS	0.0086	0.0000	0.0000	0.0000

Table 3. Unit emission factors assumed for the DMEa case (lb/MMBtu fuel input - HHV)

	Lime kiln	Bark boiler
VOC	0.0043	0.0130
CO	0.0285	0.6000
NOx	0.2857	0.2200
PM10	0.0150	0.0540
SOx	0.0286	0.1141
CO2	172	265
TRS	0.0086	0.0000

Note: in DMEa, the bark boiler also burns unconverted syngas. Aside from impacts on CO₂ and SO₂, no other benefits are assumed from the co-firing of clean syngas.

Table 4. Unit emission factors assumed for the DMEb case (lb/MMBtu fuel input - HHV)

	Lime kiln	GT	Duct burner
VOC	0.0043	0.0021	0.0054
CO	0.0285	0.0330	0.0818
NOx	0.2857	0.0897	0.0974
PM10	0.0150	0.0066	0.0074
SOx	0.0286	0.1599	0.0000
CO2	172	245	474
TRS	0.0086	0.0000	0.0000

Table 5. Unit emission factors assumed for the DMEc case (lb/MMBtu fuel input - HHV)

	Lime kiln	GT	Duct burner
VOC	0.0043	0.0021	0.0054
CO	0.0285	0.0330	0.0818
NOx	0.2857	0.0897	0.0974
PM10	0.0150	0.0066	0.0074
SOx	0.0286	0.0895	0.0000
CO2	172	240	237
TRS	0.0086	0.0000	0.0000

Table 6. Unit emission factors assumed for the FTa case (lb/MMBtu fuel input - HHV)

	Lime kiln	GT	Duct burner
VOC	0.0043	0.0021	0.0054
CO	0.0285	0.0330	0.0818
NOx	0.2857	0.0897	0.0974
PM10	0.0150	0.0066	0.0074
SOx	0.0286	0.1069	0.0956
CO2	172	272	325
TRS	0.0086	0.0000	0.0000

Table 7. Unit emission factors assumed for the FTb case (lb/MMBtu fuel input - HHV)

	Lime kiln	GT
VOC	0.0043	0.0021
CO	0.0285	0.0330
NOx	0.2857	0.0897
PM10	0.0150	0.0066
SOx	0.0286	0.1319
CO2	172	259
TRS	0.0086	0.0000

Table 8. Unit emission factors assumed for the FTc case (lb/MMBtu fuel input - HHV)

	Lime kiln	GT
VOC	0.0043	0.0021
CO	0.0285	0.0330
NOx	0.2857	0.0897
PM10	0.0150	0.0066
SOx	0.0286	0.0000
CO2	172	322
TRS	0.0086	0.0000

Table 9. Unit emission factors assumed for the mixed alcohols (MA) case (lb/MMBtu fuel input - HHV).

	Lime kiln	GT	Duct Burner
VOC	0.0043	0.0021	0.0021
CO	0.0285	0.0330	0.0330
NOx	0.2857	0.0897	0.0897
PM10	0.0150	0.0066	0.0066
SOx	0.0286	0.0000	0.1667
CO2	172	303	259
TRS	0.0086	0	0

Table 10: Total average U.S. grid emissions (including non-fossil fuel sources) assumed in estimating grid offsets.^a

lb/MWh	2010	2015	2020	2025	2030	2035
VOC	0.024	0.021	0.018	0.015	0.013	0.011
CO	0.234	0.200	0.172	0.147	0.126	0.108
NOx	1.125	0.938	0.886	0.848	0.703	0.584
PM10	0.326	0.279	0.239	0.205	0.175	0.150
SOx	2.836	2.069	1.684	1.492	1.127	0.851
CO2	1,340	1,312	1,303	1,321	1,318	1,316

(a) power plants only. Our WTW analysis did not include emissions from fuel supply to the power plants, and can thus be viewed as conservative in terms of the emissions benefits from displaced grid power.

References: [18, 19, 20, 21]. Estimates for 2031-2035 were extrapolated from the EIA forecast [19], which only goes to 2030.

3 Emissions Factors for Biofuel Fuel Chain Elements

The following tables summarize the assumptions used for the elements of the biorefinery fuel chains other than the biorefinery itself. They are all based on version 1.7 of the GREET model [22]. For the vehicle end-use, adjustments to fossil energy consumption are based on the fraction of renewable fuel. For example in Table 19, fossil energy use by the vehicle is adjusted to reflect the blend of conventional fuels and FT biofuels. The values further reflect relative energy content of the different fuels, since blends are expressed on a volume basis. Similarly, CO₂ emissions are adjusted based on the relative carbon contents of the different fuels in the blends.

Table 11. Emissions and energy use^a from biomass collection and transport (75-miles one-way)

		Collection	Transportation	Total
Total energy input	Btu/dry ton	296,885	535,817	832,703
Fossil Fuels	Btu/dry ton	291,701	534,341	826,042
VOC	g/dry ton	17	17	34
CO	g/dry ton	84	75	158
NOx	g/dry ton	163	221	384
PM10	g/dry ton	19	7	26
SOx	g/dry ton	14	14	28
CH4	g/dry ton	27	47	74
CO2	g/dry ton	23,293	41,882	65,175
Petroleum	Btu/dry ton	241,655	491,697	733,352

(a) As reported in the GREET model, energy use is reported here on an LHV basis.

Table 12. Emissions and energy use^a from DME transportation and distribution

		Barge	Pipeline	Rail	Truck
Length of haul	miles (one-way)			250	50
Energy consumption and emissions by transport mode					
		Barge	Pipeline	Rail	Truck
Energy Consumption	Btu/MMBtu	-	-	4,398	6,108
Fossil Energy Consumption	Btu/MMBtu	-	-	4,386	6,091
VOC	g/MMBtu	-	-	0.30	0.20
CO	g/MMBtu	-	-	0.84	0.85
NOx	g/MMBtu	-	-	5.79	2.52
PM10	g/MMBtu	-	-	0.16	0.08
SOx	g/MMBtu	-	-	0.11	0.16
CH4	g/MMBtu	-	-	0.40	0.54
CO2	g/MMBtu	-	-	342.90	477.40
Petroleum	Btu/MMBtu	-	-	4,036	5,605
Shares by transport mode (shares need not sum to 100%)					
		Barge	Pipeline	Rail	Truck
Transportation	%	0%	0%	100%	0%
Distribution	%	0%	0%	0%	100%
Energy consumption and emissions in transportation and distribution					
		Transportation	Distribution	Total	
Energy Consumption	Btu/MMBtu	4,398	6,108	10,506	
Fossil Energy Consumption	Btu/MMBtu	4,386	6,091	10,477	
VOC	g/MMBtu	0.30	0.20	0.50	
CO	g/MMBtu	0.84	0.85	1.69	
NOx	g/MMBtu	5.79	2.52	8.31	
PM10	g/MMBtu	0.16	0.08	0.24	
SOx	g/MMBtu	0.11	0.16	0.27	
CH4	g/MMBtu	0.40	0.54	0.94	
CO2	g/MMBtu	342.90	477.40	820.31	
Petroleum	Btu/MMBtu	4,036	5,605	9,641	

(a) As reported in the GREET model, energy use is reported here on an LHV basis.

Table 13. Emissions and energy use^a from FT Gasoline transportation and distribution

		Barge	Pipeline	Rail	Truck
Length of haul	miles (one-way)	520	400	800	30
Energy consumption and emissions by transport mode					
		Barge	Pipeline	Rail	Truck
Energy Consumption	Btu/MMBtu	10,844	3,244	9,356	1,949
Fossil Energy Consumption	Btu/MMBtu	10,822	3,185	9,330	1,943
VOC	g/MMBtu	0.46	0.11	0.65	0.06
CO	g/MMBtu	1.26	0.57	1.78	0.27
NOx	g/MMBtu	10.67	2.42	12.31	0.81
PM10	g/MMBtu	0.30	0.10	0.34	0.03
SOx	g/MMBtu	2.82	0.50	0.23	0.05
CH4	g/MMBtu	0.97	0.47	0.85	0.17
CO2	g/MMBtu	919.58	252.48	729.41	152.33
Petroleum	Btu/MMBtu	10,311.29	2,015.61	8,586	1,788
Shares by transport mode (shares need not sum to 100%)					
		Barge	Pipeline	Rail	Truck
Transportation	%	4%	73%	7%	0%
Distribution	%	0%	0%	0%	100%
Energy consumption and emissions in transportation and distribution					
		Transportation	Distribution	Total	
Energy Consumption	Btu/MMBtu	3,457	1,949	5,406	
Fossil Energy Consumption	Btu/MMBtu	3,411	1,943	5,355	
VOC	g/MMBtu	0.15	0.06	0.21	
CO	g/MMBtu	0.59	0.27	0.86	
NOx	g/MMBtu	3.06	0.81	3.86	
PM10	g/MMBtu	0.11	0.03	0.13	
SOx	g/MMBtu	0.49	0.05	0.54	
CH4	g/MMBtu	0.44	0.17	0.61	
CO2	g/MMBtu	272.15	152.33	424.48	
Petroleum	Btu/MMBtu	2,485	1,788	4,273	

(a) As reported in the GREET model, energy use is reported here on an LHV basis.

Table 14. Emissions and energy use^a from FT Diesel transportation and distribution

		Barge	Pipeline	Rail	Truck
Length of haul	miles (one-way)	520	400	800	30
Energy consumption and emissions by transport mode					
		Barge	Pipeline	Rail	Truck
Energy Consumption	Btu/MMBtu	10,894	3,259	11,486	2,392
Fossil Energy Consumption	Btu/MMBtu	10,873	3,200	11,470	2,389
VOC	g/MMBtu	0.47	0.11	0.67	0.07
CO	g/MMBtu	1.27	0.57	1.85	0.28
NOx	g/MMBtu	10.72	2.44	12.47	0.83
PM10	g/MMBtu	0.30	0.10	0.37	0.03
SOx	g/MMBtu	2.84	0.50	0.24	0.05
CH4	g/MMBtu	0.97	0.47	1.21	0.25
CO2	g/MMBtu	923.85	253.65	779.37	162.74
Petroleum	Btu/MMBtu	10,359.14	2,024.96	4,313	898
Shares by transport mode (shares need not sum to 100%)					
		Barge	Pipeline	Rail	Truck
Transportation	%	6%	75%	7%	0%
Distribution	%	0%	0%	0%	100%
Energy consumption and emissions in transportation and distribution					
		Transportation	Distribution	Total	
Energy Consumption	Btu/MMBtu	3,902	2,392	6,295	
Fossil Energy Consumption	Btu/MMBtu	3,855	2,389	6,244	
VOC	g/MMBtu	0.16	0.07	0.23	
CO	g/MMBtu	0.63	0.28	0.92	
NOx	g/MMBtu	3.34	0.83	4.17	
PM10	g/MMBtu	0.12	0.03	0.15	
SOx	g/MMBtu	0.56	0.05	0.61	
CH4	g/MMBtu	0.50	0.25	0.74	
CO2	g/MMBtu	300.23	162.74	462.96	
Petroleum	Btu/MMBtu	2,442	898	3,340	

(a) As reported in the GREET model, energy use is reported here on an LHV basis.

Table 15. Emissions and energy use^a from mixed alcohol transportation and distribution

		Barge	Pipeline	Rail	Truck
Length of haul	miles (one-way)			250	50
Energy consumption and emissions by transport mode					
		Barge	Pipeline	Rail	Truck
Energy Consumption	Btu/MMBtu	-	-	4,713	5,236
Fossil Energy Consumption	Btu/MMBtu	-	-	4,700	5,222
VOC	g/MMBtu	-	-	0.33	0.17
CO	g/MMBtu	-	-	0.90	0.73
NOx	g/MMBtu	-	-	6.20	2.16
PM10	g/MMBtu	-	-	0.17	0.07
SOx	g/MMBtu	-	-	0.12	0.14
CH4	g/MMBtu	-	-	0.43	0.46
CO2	g/MMBtu	-	-	367.46	409.27
Petroleum	Btu/MMBtu	-	-	4,325	4,805
Shares by transport mode (shares need not sum to 100%)					
		Barge	Pipeline	Rail	Truck
Transportation	%	0%	0%	100%	0%
Distribution	%	0%	0%	0%	100%
Energy consumption and emissions in transportation and distribution					
		Transportation	Distribution	Total	
Energy Consumption	Btu/MMBtu	4,713	5,236	9,949	
Fossil Energy Consumption	Btu/MMBtu	4,700	5,222	9,922	
VOC	g/MMBtu	0.33	0.17	0.49	
CO	g/MMBtu	0.90	0.73	1.63	
NOx	g/MMBtu	6.20	2.16	8.36	
PM10	g/MMBtu	0.17	0.07	0.24	
SOx	g/MMBtu	0.12	0.14	0.26	
CH4	g/MMBtu	0.43	0.46	0.89	
CO2	g/MMBtu	367.46	409.27	776.73	
Petroleum	Btu/MMBtu	4,325	4,805	9,130	

(a) As reported in the GREET model, energy use is reported here on an LHV basis.

Table 16. Emissions and energy use^a from FT Crude transportation and distribution

		Barge	Pipeline	Rail	Truck
Length of haul	miles (one-way)			100	0
Energy consumption and emissions by transport mode					
		Barge	Pipeline	Rail	Truck
Energy Consumption	Btu/MMBtu	-	-	1,190	-
Fossil Energy Consumption	Btu/MMBtu	-	-	1,187	-
VOC	g/MMBtu	-	-	0.08	-
CO	g/MMBtu	-	-	0.23	-
NOx	g/MMBtu	-	-	1.57	-
PM10	g/MMBtu	-	-	0.04	-
SOx	g/MMBtu	-	-	0.03	-
CH4	g/MMBtu	-	-	0.11	-
CO2	g/MMBtu	-	-	92.81	-
Petroleum	Btu/MMBtu	-	-	1,092	-
Shares by transport mode (shares need not sum to 100%)					
		Barge	Pipeline	Rail	Truck
Transportation	%	0%	0%	100%	0%
Distribution	%	0%	0%	0%	0%
Energy consumption and emissions in transportation and distribution					
		Transportation	Distribution	Total	
Energy Consumption	Btu/MMBtu	1,190	-	1,190	
Fossil Energy Consumption	Btu/MMBtu	1,187	-	1,187	
VOC	g/MMBtu	0.08	-	0.08	
CO	g/MMBtu	0.23	-	0.23	
NOx	g/MMBtu	1.57	-	1.57	
PM10	g/MMBtu	0.04	-	0.04	
SOx	g/MMBtu	0.03	-	0.03	
CH4	g/MMBtu	0.11	-	0.11	
CO2	g/MMBtu	92.81	-	92.81	
Petroleum	Btu/MMBtu	1,092	-	1,092	

(a) As reported in the GREET model, energy use is reported here on an LHV basis.

Table 17. Emissions and energy use^a from FT Crude refining

FT Gasoline				
Energy Efficiency	86%	Refining	Non-Combustion Emissions	Total
Total energy	Btu/MMBtu	180,956		180,956
Fossil fuels	Btu/MMBtu	178,621		178,621
Petroleum	Btu/MMBtu	88,740		88,740
Total emissions: grams/mmBtu of fuel throughput				
VOC	g/MMBtu	0.92	2.31	3.226
CO	g/MMBtu	3.78	1.15	4.930
NOx	g/MMBtu	14.67	1.36	16.030
PM10	g/MMBtu	6.37	0.32	6.690
SOx	g/MMBtu	10.11	4.41	14.519
CH4	g/MMBtu	14.78	0.00	14.783
CO2	g/MMBtu	12,205.57	1,172.00	13,378
FT Diesel				
Energy Efficiency	89%	Refining	Non-Combustion Emissions	Total
Total energy	Btu/MMBtu	137,387		137,387
Fossil fuels	Btu/MMBtu	135,615		135,615
Petroleum	Btu/MMBtu	67,374		67,374
Total emissions: grams/mmBtu of fuel throughput				
VOC	g/MMBtu	0.70	2.23	2.927
CO	g/MMBtu	2.87	1.12	3.982
NOx	g/MMBtu	11.14	1.32	12.453
PM10	g/MMBtu	4.84	0.31	5.145
SOx	g/MMBtu	7.67	4.26	11.937
CH4	g/MMBtu	11.22	-	11.223
CO2	g/MMBtu	9,266.83	920.86	10,188
Assumed Yield of FT Diesel vs. Gasoline - Energy Basis				
FTD	62%			
FTG	38%			

(a) As reported in the GREET model, energy use is reported here on an LHV basis. We assume the same refining requirements as for conventional gasoline and conventional diesel. See Volume 1 for additional details.

Table 18. Energy consumption and emissions assumptions for DME in light-duty vehicles (CIDI Engines)^a

DME in CIDI engines			Source data (DME from NG)			NCI Adjustments to Default GREET Values (b)		
Energy Consumption Ratio to Conventional Fuel (c)						%	New Estimate	Notes
Energy Consumption	Btu/mile	3,405.1	Energy consumption	Btu/mile	3405.057	100%	3,405	
Fossil Energy Cons.	Btu/mile	0.0	Fossil Energy Consumption	Btu/mile	3405.057	0%	-	100% biofuel
VOC	grams/mile	0.044	VOC: exhaust	grams/mile	0.088	50%	0.0440	
CO	grams/mile	0.269	VOC: evaporation	grams/mile	0	100%	-	
NOx	grams/mile	0.106	CO	grams/mile	0.539	50%	0.2695	
PM10	grams/mile	0.021	NOx	grams/mile	0.141	75%	0.1058	
SOx	grams/mile	0.000	PM10: exhaust	grams/mile	0.009	10%	0.0009	
CH4	grams/mile	0.005	PM10: brake and tire wear	grams/mile	0.0205	100%	0.0205	
CO2	grams/mile	238.1	SOx	grams/mile	0	100%	-	
			CH4	grams/mile	0.0052	100%	0.0052	
			N2O	grams/mile	0.012	100%	0.0120	
			CO2	grams/mile	238.0607	100%	238	

From GREET "Vehicles" sheet, Table 3.

- (a) As reported in the GREET model, energy use is reported here on an LHV basis..
- (b) Adjustments to VOC, CO, NOx and PM10 emissions are based on [23].
- (c) This ratio is the total energy used in the conventional fuel chain (well to wheels) relative to the amount of biofuel used by the vehicle. It is used to calculate the emissions displaced in the conventional fuel chain per unit of biofuel produced.

Table 19. Energy consumption and emissions assumptions for FT fuels blended with conventional fuels in light-duty vehicles (FT gasoline in gasoline engines and FT diesel in CIDI engines) ^a

FT gasoline blend in gasoline engines			Source data (100% CG+RFG)			NCI Adjustments to Default GREET Values (b)		
						%	New Estimate	Notes
Energy Consumption Ratio to Conventional Fuel (c)		1.24	Energy consumption	Btu/mile	4630.877	100%	4,631	
Energy Consumption	Btu/mile	4,630.9	Fossil Energy Consumption	Btu/mile	4534.56	90.6%	4,107	
Fossil Energy Cons.	Btu/mile	4,106.7	VOC: exhaust	grams/mile	0.122	100%	0.1220	
VOC	grams/mile	0.180	VOC: evaporation	grams/mile	0.058	100%	0.0580	
CO	grams/mile	3.745	CO	grams/mile	3.745	100%	3.7450	
NOx	grams/mile	0.141	NOx	grams/mile	0.141	100%	0.1410	
PM10	grams/mile	0.029	PM10: exhaust	grams/mile	0.0081	100%	0.0081	
SOx	grams/mile	0.006	PM10: brake and tire wearin	grams/mile	0.0205	100%	0.0205	
CH4	grams/mile	0.015	SOx	grams/mile	0.005808	100%	0.0058	
CO2	grams/mile	342.9	CH4	grams/mile	0.0146	100%	0.0146	
			N2O	grams/mile	0.012	100%	0.0120	
			CO2	grams/mile	344.0764	99.6%	343	

From GREET "Vehicles" sheet, Table 3.
Note: the above figures are for Gasoline Vehicle: Baseline Gasoline (CG and RFG)

Assumed Mix (by volume)	
Gasoline	90%
FT Gasoline	10%

FT diesel blend in CIDI engines			Source data (100% LSD)			NCI Adjustments to Default GREET Values (b)		
						%	New Estimate	Notes
Energy Consumption Ratio to Conventional Fuel (c)		1.21	Energy consumption	Btu/mile	3,405.06	100%	3,405	
Energy Consumption	Btu/mile	3,405.1	Fossil Energy Consumption	Btu/mile	3,405.06	90.4%	3,078	
Fossil Energy Cons.	Btu/mile	3,078.4	VOC: exhaust	grams/mile	0.088	100%	0.0880	
VOC	grams/mile	0.088	VOC: evaporation	grams/mile	-	100%	-	
CO	grams/mile	0.539	CO	grams/mile	0.54	100%	0.5390	
NOx	grams/mile	0.141	NOx	grams/mile	0.14	100%	0.1410	
PM10	grams/mile	0.030	PM10: exhaust	grams/mile	0.009	100%	0.0090	
SOx	grams/mile	0.002	PM10: brake and tire wearin	grams/mile	0.021	100%	0.0205	
CH4	grams/mile	0.003	SOx	grams/mile	0.002	100%	0.0019	
CO2	grams/mile	268.3	CH4	grams/mile	0.003	100%	0.0026	
			N2O	grams/mile	0.012	100%	0.0120	
			CO2	grams/mile	269.238	99.6%	268	

From GREET "Vehicles" sheet, Table 3.

Assumed Mix (by volume)	
LS Diesel	90%
FT Diesel	10%

- (a) As reported in the GREET model, energy use is reported here on an LHV basis.
- (b) No adjustments made to emissions for low-level blends other than carbon and fossil fuel content.
- (c) This ratio is the total energy used in the conventional fuel chain (well to wheels) relative to the amount of biofuel used by the vehicle. It is used to calculate the emissions displaced in the conventional fuel chain per unit of biofuel produced.

Table 20. Energy consumption and emissions assumptions for FT fuels in light-duty vehicles (FT gasoline in gasoline engines and FT diesel in CIDI engines). ^a

FT gasoline in gasoline engines			Source data (100% CG+RFG)			NCI Adjustments to Default GREET Values		
						%	New Estimate	Notes
Energy Consumption Ratio to Conventional Fuel (c)		1.24	Energy consumption	Btu/mile	4630.877	100%	4,631	
Energy Consumption	Btu/mile	4,630.9	Fossil Energy Consumption	Btu/mile	4534.56	0%	-	100% biofuel
Fossil Energy Cons.	Btu/mile	0.0	VOC: exhaust	grams/mile	0.122	100%	0.1220	
VOC	grams/mile	0.180	VOC: evaporation	grams/mile	0.058	100%	0.0580	
CO	grams/mile	3.745	CO	grams/mile	3.745	100%	3.7450	
NOx	grams/mile	0.141	NOx	grams/mile	0.141	100%	0.1410	
PM10	grams/mile	0.029	PM10: exhaust	grams/mile	0.0081	100%	0.0081	
SOx	grams/mile	0.000	PM10: brake and tire wearin	grams/mile	0.0205	100%	0.0205	
CH4	grams/mile	0.015	SOx	grams/mile	0.005808	0%	-	
CO2	grams/mile	332.0	CH4	grams/mile	0.0146	100%	0.0146	
			N2O	grams/mile	0.012	100%	0.0120	
			CO2	grams/mile	344.0764	96%	332	

From GREET "Vehicles" sheet, Table 3.
Note: the above figures are for conventional gasoline engine operation.
GREET does not provide figures for FT gasoline in internal combustion engine.

Assumed Mix (by volume)	
LS Diesel	90%
FT Diesel	10%

FT diesel in CIDI engines			Source data (FTD from NG)			NCI Adjustments to Default GREET Values		
						%	New Estimate	Notes
Energy Consumption Ratio to Conventional Fuel (c)		1.21	Energy consumption	Btu/mile	3405.057	100%	3,405	
Energy Consumption	Btu/mile	3,405.1	Fossil Energy Consumption	Btu/mile	3405.057	0%	-	100% biofuel
Fossil Energy Cons.	Btu/mile	0.0	VOC: exhaust	grams/mile	0.088	80%	0.0704	
VOC	grams/mile	0.070	VOC: evaporation	grams/mile	0	100%	-	
CO	grams/mile	0.350	CO	grams/mile	0.539	65%	0.3503	
NOx	grams/mile	0.134	NOx	grams/mile	0.141	95%	0.1340	
PM10	grams/mile	0.027	PM10: exhaust	grams/mile	0.009	75%	0.0067	
SOx	grams/mile	0.000	PM10: brake and tire wearin	grams/mile	0.0205	100%	0.0205	
CH4	grams/mile	0.003	SOx	grams/mile	0	100%	-	
CO2	grams/mile	259.8	CH4	grams/mile	0.0026	100%	0.0026	
			N2O	grams/mile	0.012	100%	0.0120	
			CO2	grams/mile	259.8028	100%	260	

From GREET "Vehicles" sheet, Table 3.

- (a) As reported in the GREET model, energy use is reported here on an LHV basis..
- (b) Adjustments to VOC, CO, NOx and PM10 emissions are based on [24].
- (c) This ratio is the total energy used in the conventional fuel chain (well to wheels) relative to the amount of biofuel used by the vehicle. It is used to calculate the emissions displaced in the conventional fuel chain per unit of biofuel produced.

Table 21. Energy consumption and emissions assumptions for mixed alcohol use in light-duty vehicles (low-level blend with gasoline and Flexible-Fuel Vehicle ["E-85"])^a

MA Case: Gasoline Vehicle - low-level blend with gasoline			Source data (E10 in CG)			NCI Adjustments to Default GREET Values (b)		
						%	New Estimate	Notes
Energy Consumption Ratio to Conventional Fuel (c)		1.24	Energy consumption	Btu/mile	4630.877	100%	4,631	
Energy Consumption	Btu/mile	4,630.9	Fossil Energy Consumption	Btu/mile	4331.89	98%	4,233	
Fossil Energy Cons.	Btu/mile	4,232.7	VOC: exhaust	grams/mile	0.122	100%	0.1220	
VOC	grams/mile	0.180	VOC: evaporation	grams/mile	0.058	100%	0.0580	
CO	grams/mile	3.74	CO	grams/mile	3.745	100%	3.7450	
NOx	grams/mile	0.141	NOx	grams/mile	0.141	100%	0.1410	
PM10	grams/mile	0.029	PM10: exhaust	grams/mile	0.0081	100%	0.0081	
SOx	grams/mile	0.005	PM10: brake and tire wearin	grams/mile	0.0205	100%	0.0205	
CH4	grams/mile	0.015	SOx	grams/mile	0.0054	100%	0.0054	
CO2	grams/mile	355.5	CH4	grams/mile	0.0146	100%	0.0146	
			N2O	grams/mile	0.012	100%	0.0120	
			CO2	grams/mile	355.2202	100%	355	
			From GREET "Vehicles" sheet, Table 3.					
MA Case: Flexible-Fuel Vehicle ("E-85")			Source data (E85 FFV)			NCI Adjustments to Default GREET Values (b)		
						%	New Estimate	Notes
Energy Consumption Ratio to Conventional Fuel (c)		1.30	Energy consumption	Btu/mile	4410.36	100%	4,410	
Energy Consumption	Btu/mile	4,410.4	Fossil Energy Consumption	Btu/mile	1164.299	81%	938	
Fossil Energy Cons.	Btu/mile	937.6	VOC: exhaust	grams/mile	0.122	100%	0.1220	
VOC	grams/mile	0.171	VOC: evaporation	grams/mile	0.0493	100%	0.0493	
CO	grams/mile	3.745	CO	grams/mile	3.745	100%	3.7450	
NOx	grams/mile	0.141	NOx	grams/mile	0.141	100%	0.1410	
PM10	grams/mile	0.029	PM10: exhaust	grams/mile	0.0081	100%	0.0081	
SOx	grams/mile	0.002	PM10: brake and tire wearin	grams/mile	0.0205	100%	0.0205	
CH4	grams/mile	0.015	SOx	grams/mile	0.001841	100%	0.0018	
CO2	grams/mile	334.5	CH4	grams/mile	0.0146	100%	0.0146	
			N2O	grams/mile	0.012	100%	0.0120	
			CO2	grams/mile	332.6515	101%	334	
			From GREET "Vehicles" sheet, Table 3.					
GREET assumptions on Ethanol fuel blends								
Volumetric share of an alternative fuel in a fuel blend								
EtOH in low-level EtOH blend in gasoline		9.50%						
Ethanol for FFV fuel		80.75%						
Ethanol for dedicated vehicle fuel		80.75%						
From GREET "Vehicles" sheet, Table 1								

- (a) As reported in the GREET model, energy use is reported here on an LHV basis.
- (b) No adjustments made to emissions other than carbon and fossil fuel content.
- (c) This ratio is the total energy used in the conventional fuel chain (well to wheels) relative to the amount of biofuel used by the vehicle. It is used to calculate the emissions displaced in the conventional fuel chain per unit of biofuel produced.

4 Emissions Factors for Conventional Fuel Chains

These factors are all taken from the GREET model.

Table 22. Energy consumption^a and emissions for the gasoline fuel chain

Gasoline Vehicle: Baseline Gasoline (CG and RFG) (Btu/mile or grams/mile)				
	Feedstock	Fuel	Vehicle Oper	Total
Total Energy	177.34	942.32	4,630.88	5,750.53
Fossil Fuels	170.71	929.85	4,534.56	5,635.12
Petroleum	56.25	444.69	4,534.56	5,035.50
CO ₂	17.71	70.14	344.08	431.93
CH ₄	0.42	0.08	0.01	0.52
N ₂ O	0.00	0.01	0.01	0.02
GHGs	27.52	73.87	347.96	449.36
VOC: Total	0.02	0.11	0.18	0.31
CO: Total	0.03	0.03	3.74	3.81
NO _x : Total	0.09	0.11	0.14	0.35
PM ₁₀ : Total	0.01	0.04	0.03	0.07
SO _x : Total	0.04	0.08	0.01	0.12

(a) As reported in the GREET model, energy use is reported here on an LHV basis.

Table 23. Energy consumption^a and emissions for the low-sulfur diesel fuel chain

CIDI Vehicle: LS Diesel (Btu/mile or grams/mile)				
	Feedstock	Fuel	Vehicle Oper	Total
Total Energy	130.30	586.94	3,405.06	4,122.29
Fossil Fuels	125.43	579.45	3,405.06	4,109.94
Petroleum	41.33	294.58	3,405.06	3,740.96
CO ₂	13.01	43.61	269.238	325.86
CH ₄	0.31	0.05	0.003	0.36
N ₂ O	0.00	0.00	0.012	0.01
GHGs	20.22	44.93	272.850	338.00
VOC: Total	0.01	0.02	0.088	0.11
CO: Total	0.02	0.02	0.539	0.58
NO _x : Total	0.07	0.07	0.141	0.28
PM ₁₀ : Total	0.01	0.02	0.030	0.06
SO _x : Total	0.03	0.05	0.002	0.08
VOC: Urban	0.00	0.01	0.055	0.07
CO: Urban	0.00	0.01	0.335	0.35
NO _x : Urban	0.00	0.03	0.088	0.12
PM ₁₀ : Urban	0.00	0.00	0.018	0.02
SO _x : Urban	0.00	0.02	0.001	0.03


(a) As reported in the GREET model, energy use is reported here on an LHV basis.

5 Annual Emissions Estimate per Mill in 2010

Figure 2 through Figure 8 provide the results of the WTW analysis for the year 2010. They provide details of the emissions from the different biorefinery cases, the associated offsets and the net emissions. The difference between the net emissions of the Tomlinson case and the net emissions of the biorefinery cases is the improvement resulting from deployment of biorefinery technology. These were presented in Volume 1. Here we provide the details behind the results shown in Volume 1.

Figure 2 includes within the “mill” category the CO₂ emissions from biomass . It is then taken as a credit in the “offset” column as “Biomass CO₂”. In Figure 8, only combustion sources of TRS are shown. Other existing sources of TRS emissions are not included in the analysis, as they are assumed to be the same in all cases, and were therefore not quantified here.

Figure 2: CO₂ emissions in year 2010, short tons per mill per year

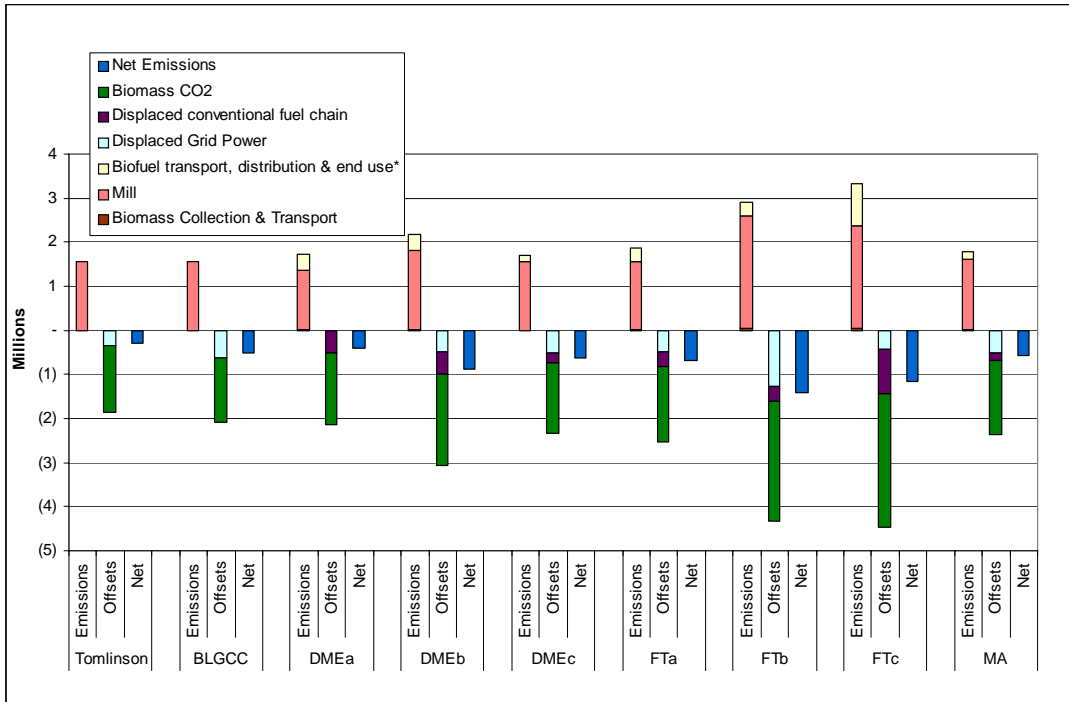


* Transportation of the crude FT product to the oil refinery included in FT cases.

Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.

Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 3: SO₂ emissions in year 2010, short tons per mill per year

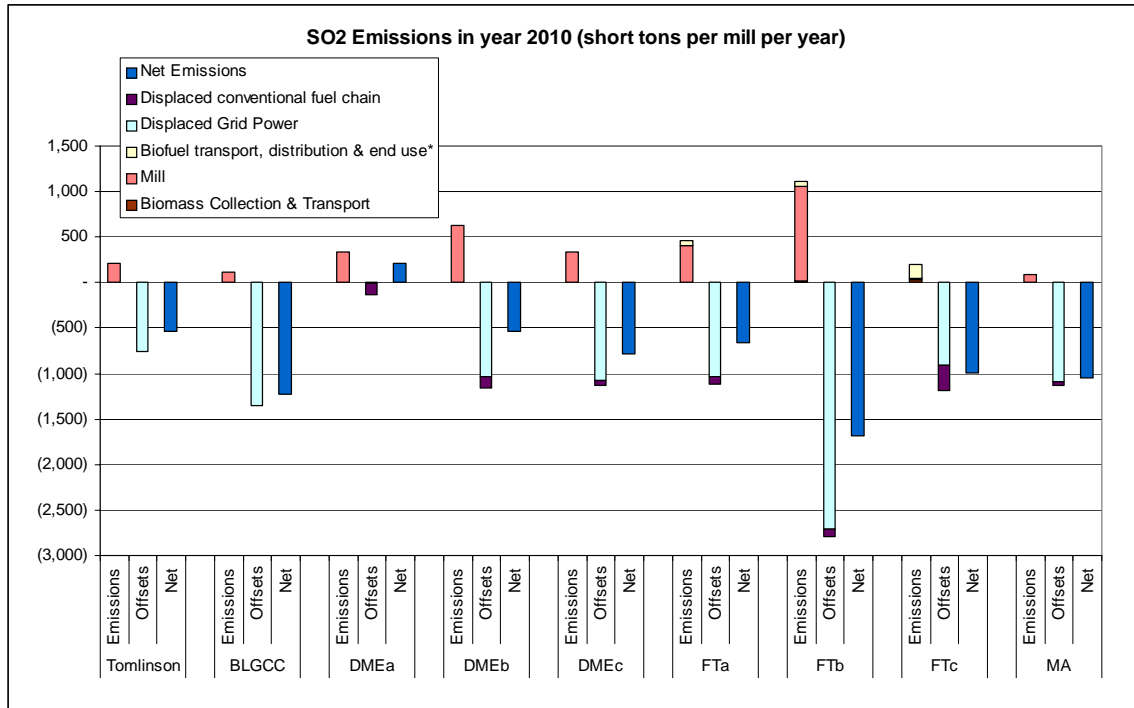


* Transportation of the crude FT product to the oil refinery included in FT cases.

Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.

Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 4: NO_x emissions in year 2010, short tons per mill per year

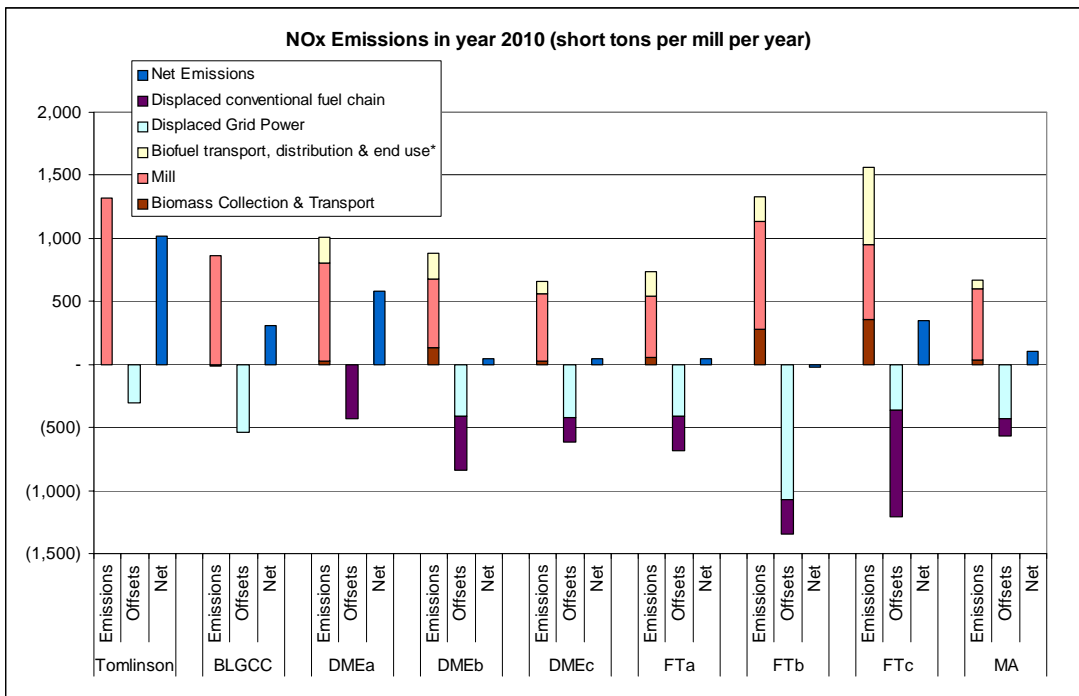


* Transportation of the crude FT product to the oil refinery included in FT cases.

Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.


Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 5: VOC emissions in year 2010, short tons per mill per year

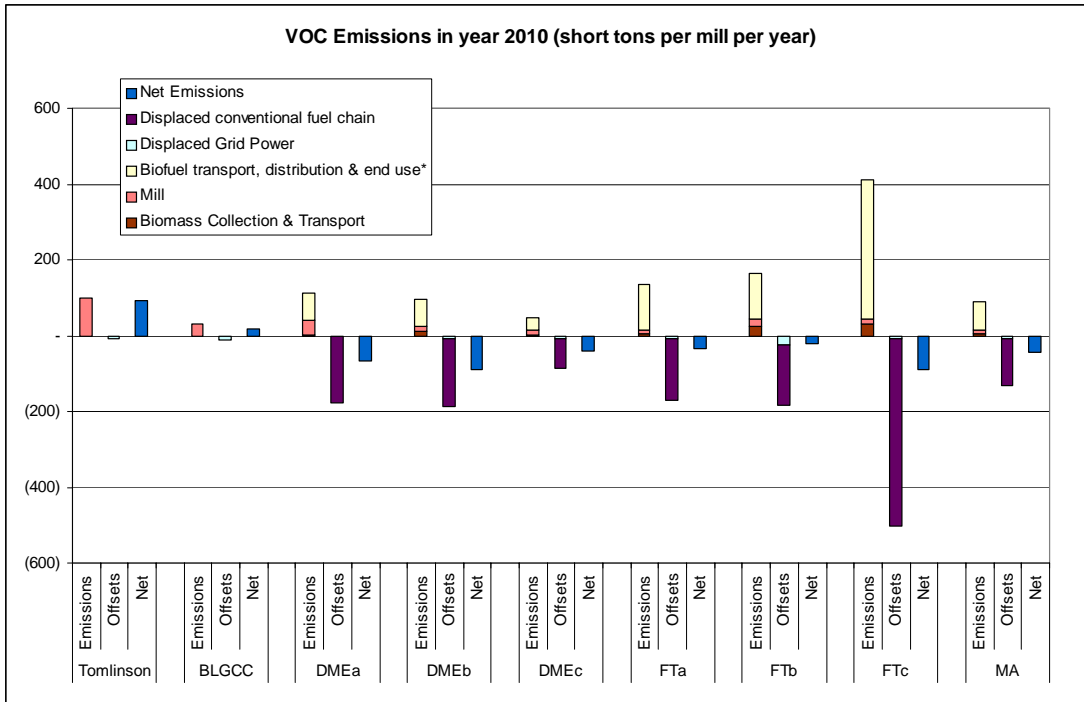


* Transportation of the crude FT product to the oil refinery included in FT cases.
 Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 6: CO Emissions in year 2010, short tons per mill per year

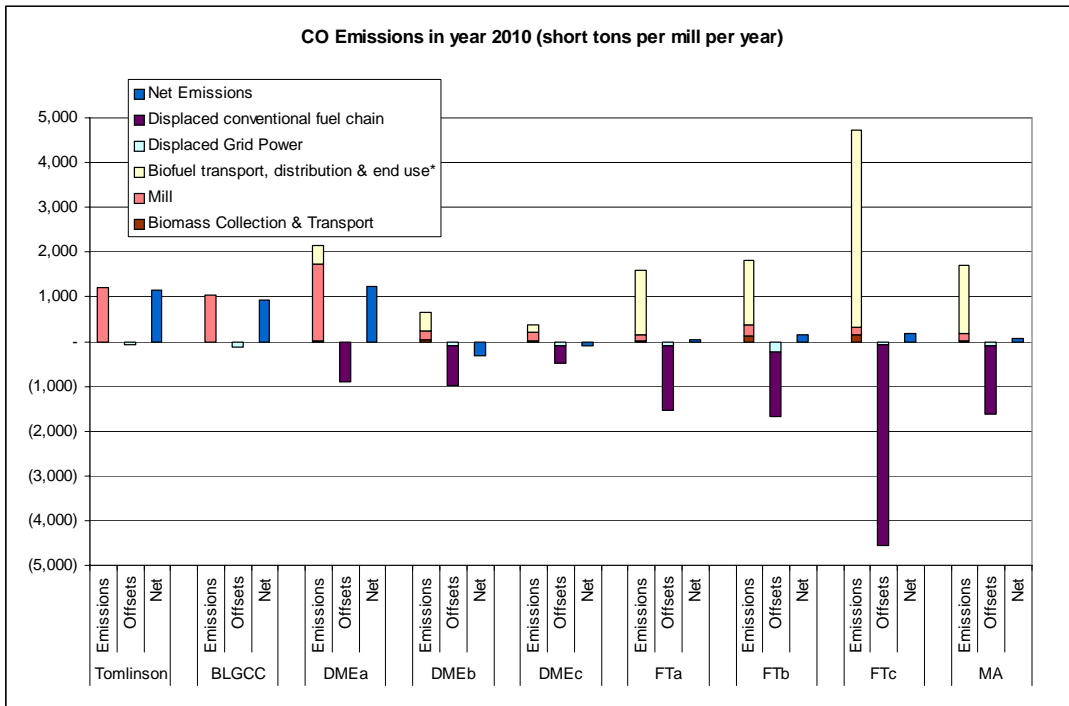


* Transportation of the crude FT product to the oil refinery included in FT cases.
 Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 7: PM10 Emissions in year 2010, short tons per mill per year

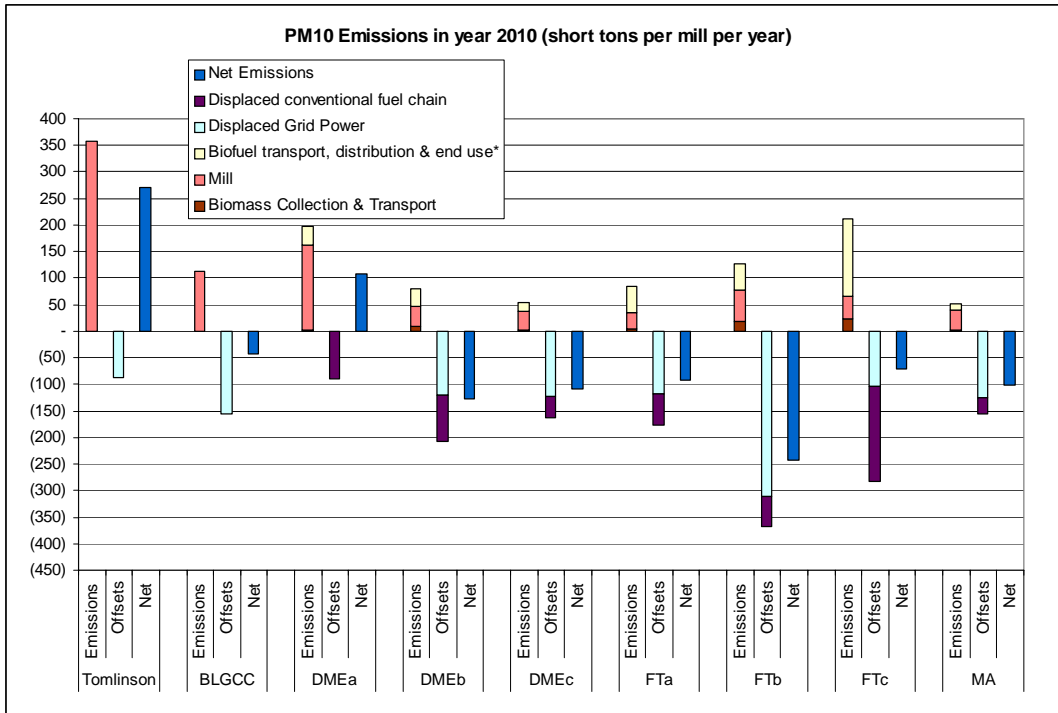

* Transportation of the crude FT product to the oil refinery included in FT cases.
 Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 8: TRS Emissions in year 2010, short tons per mill per year

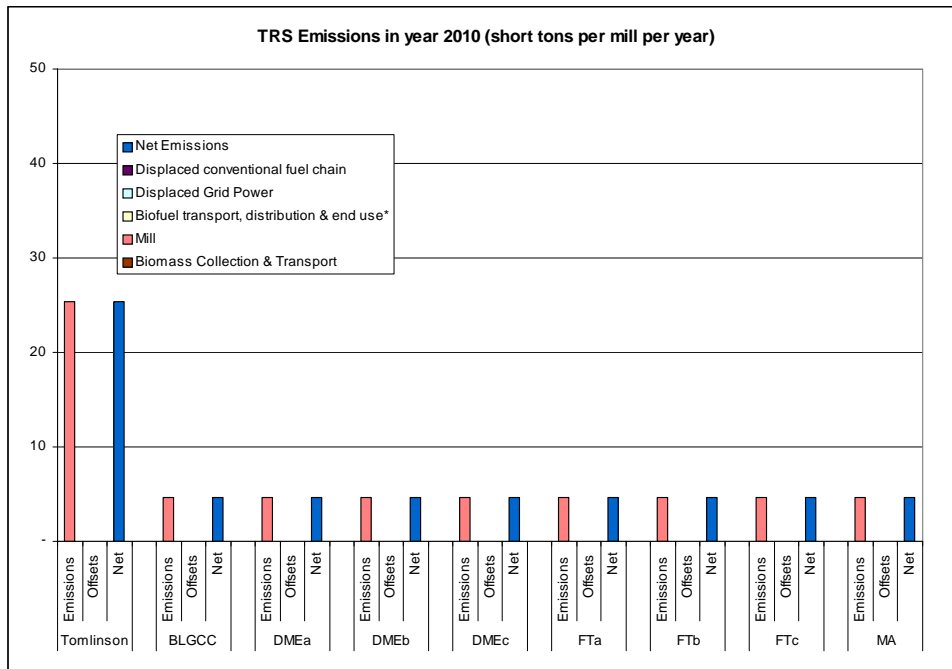

* Transportation of the crude FT product to the oil refinery included in FT cases.
 Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.
 TRS emissions are for combustion sources only.

6 Results from the Market Penetration Analysis

National energy and emissions impacts were estimated under three separate market penetration scenarios. Table 24 summarizes the basic inputs to the three scenarios and Figure 9 shows the results, expressed in terms of total black liquor capacity and the number of reference mills this would represent. The reader is referred to Volume 1 for additional details on these scenarios, which were developed based on [25, 26, 27]. Figure 10 through Figure 30 summarize the results of the energy and emissions impacts for all the biorefinery cases and market penetration scenarios. These impact estimates assume that mixed alcohols and FT biofuels are used in low-level blends with their conventional counterparts, specifically, a 10% blend of mixed alcohols with gasoline and a 10% blend of FT diesel with low-sulfur diesel. Impacts with high-level blends are described in Section 6.1.

Table 24: Summary of Biorefinery market penetration scenarios developed in this study.

	Low Scenario	Base Scenario	Aggressive Scenario
Technical Market Potential^a	<ul style="list-style-type: none"> • 180 operable recovery boilers • Combined capacity of ~472 million lbs/day dry solids (~86 million t/yr) 		
Ultimate Adoption Rate	<ul style="list-style-type: none"> • 90% of the technical market potential 		
Industry Growth	<ul style="list-style-type: none"> • 1.27% per year, based on total black liquor capacity, estimated from data provided in [28] 		
Basis	<ul style="list-style-type: none"> • Traditional market penetration “S” curve for capital intensive, facility-level investments 		<ul style="list-style-type: none"> • Aggressive penetration curve assuming that normal rules of market penetration may not apply due to the age of the Tomlinson boiler fleet and other market drivers (see main text for discussion)
Saturation Time (years)^b	30	20	10
Age of “New” boilers when replacement with BLGCC is considered	35	30	30
Age of “Rebuilt” boilers when replacement with BLGCC is considered	15	10	10

- (a) The Black Liquor Recovery Boiler Committee (BLRBC) of the American Forest and Paper Association maintains a database of individual recovery boilers with information on capacity, location, age, rebuild year (if any), and in some cases, the nature of the rebuild. This database can be used to calculate the average boiler size, average boiler age when a rebuild occurred (~20 years), and to identify which boilers will be ready for replacement in any given future year. Because additional industry consolidation and mill closures are expected, and few if any new mills are likely to be built, the analysis is based on total capacity rather than number of mills.
- (b) Defined as the time required to go from 10% penetration to 90% penetration.

Figure 9: Market penetration estimates used to assess energy and environmental impacts of biorefinery implementation in the United States.



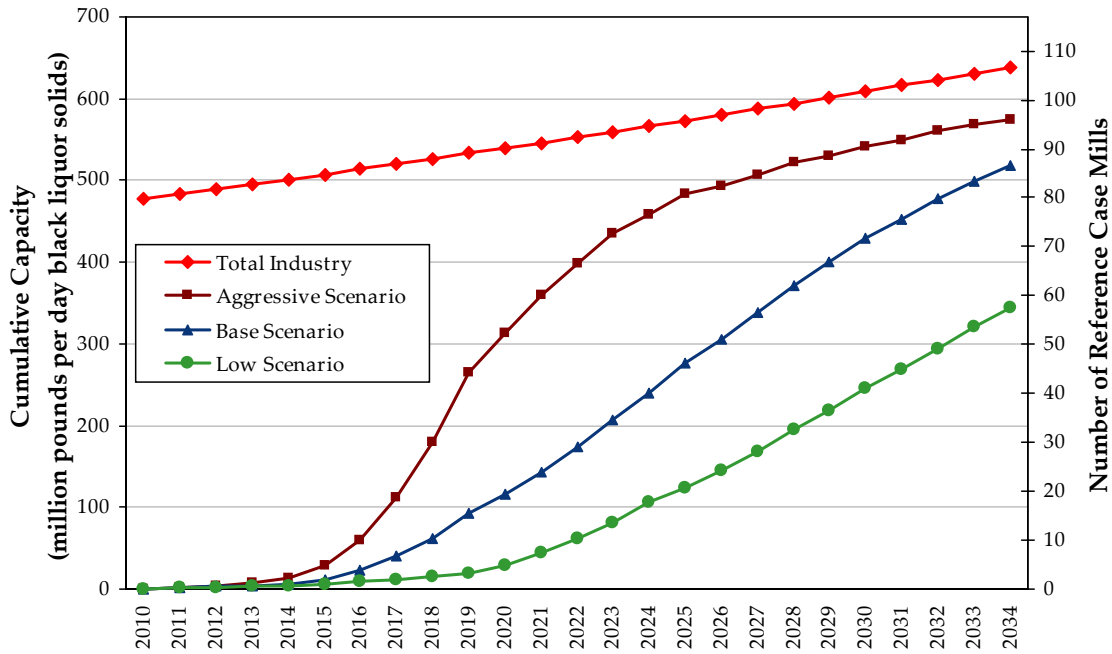


Figure 10: Net fossil fuel energy savings – HHV (Aggressive market penetration scenario)

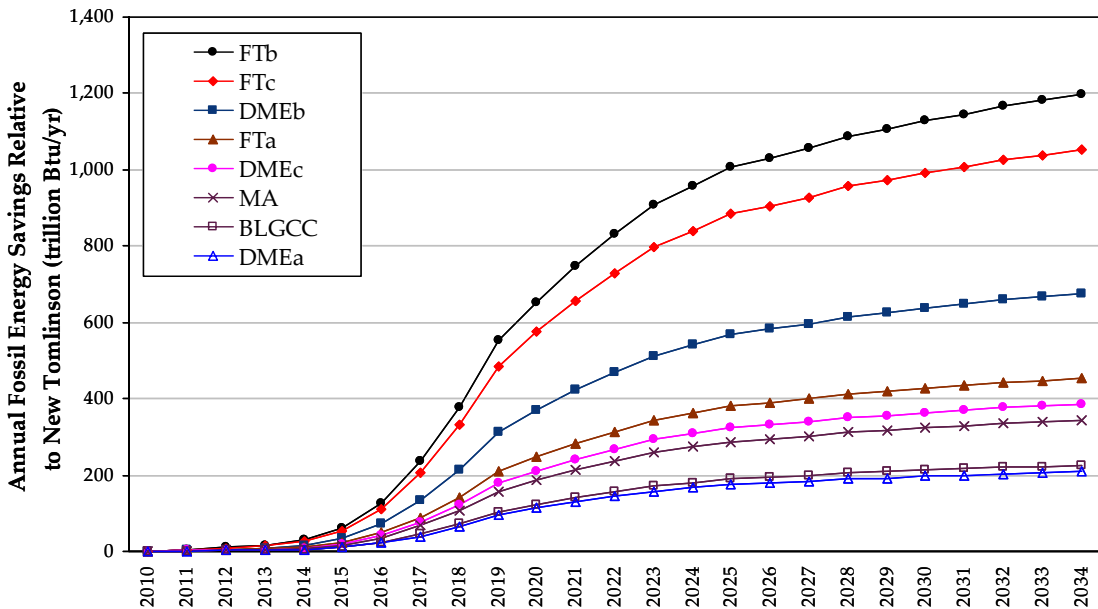


Note: Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 11: Net fossil fuel energy savings – HHV (Base market penetration scenario)

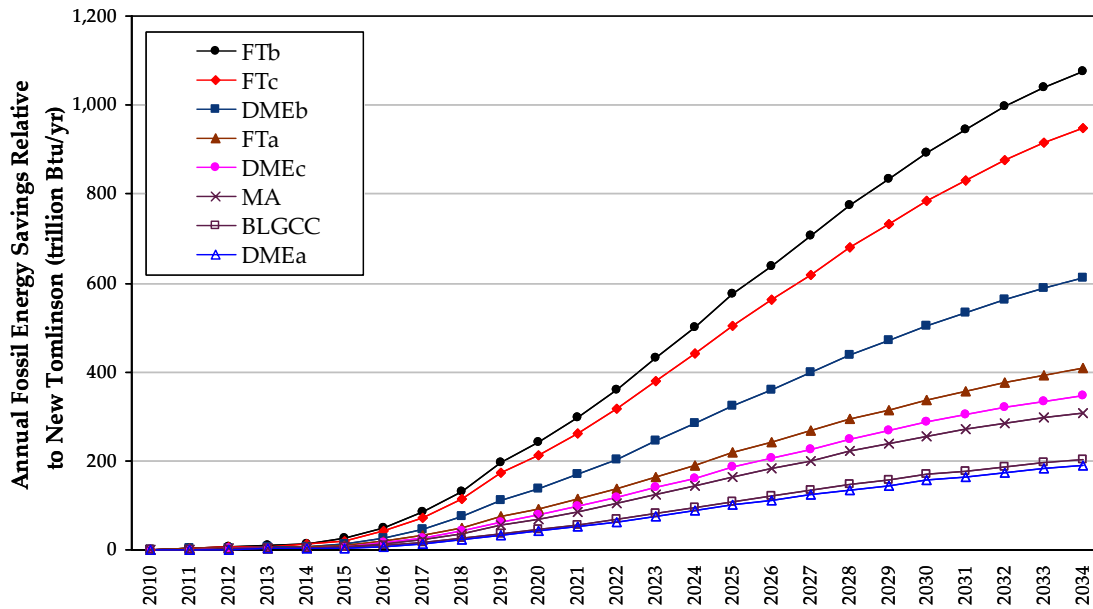


Note: Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 12: Net fossil fuel energy savings – HHV (Low market penetration scenario)

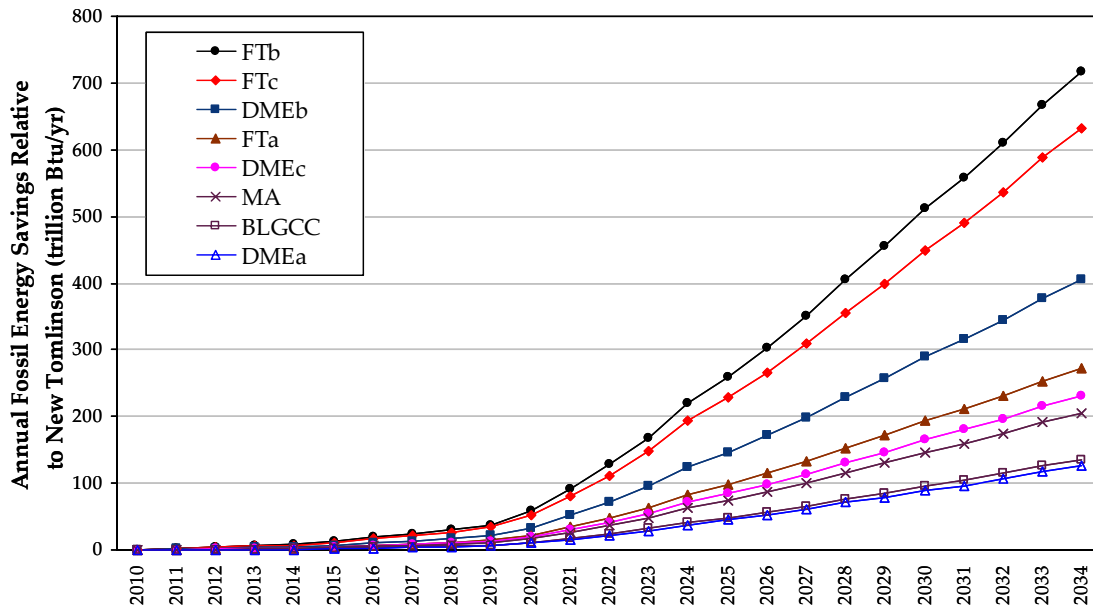


Note: Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 13: Net CO₂ emissions reductions (with credit for biomass CO₂) (Aggressive market penetration scenario)

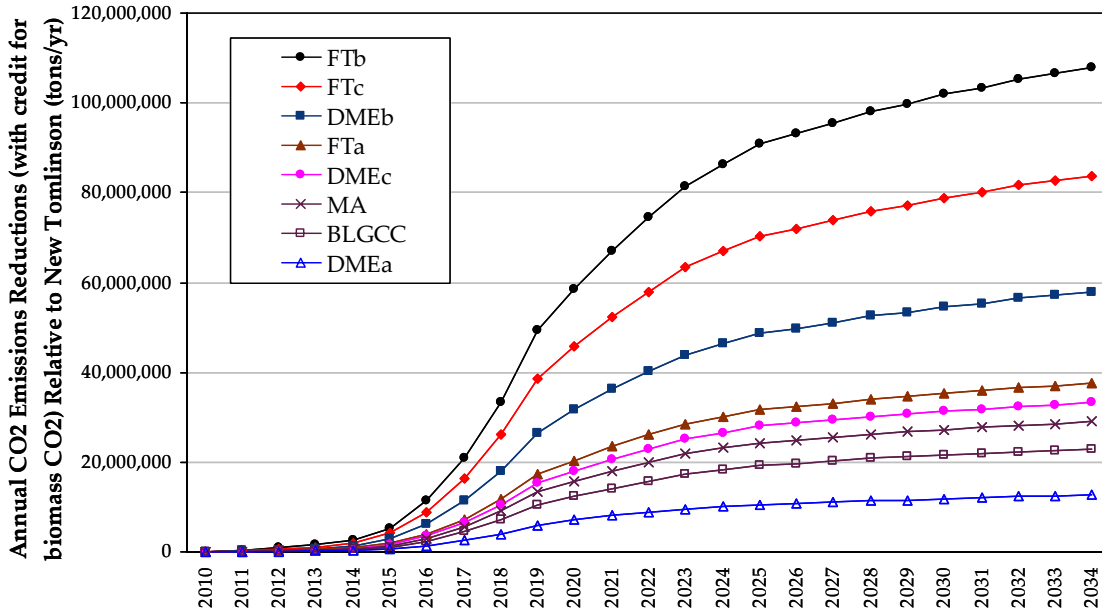


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 14: Net CO₂ emissions reductions (with credit for biomass CO₂) (Base market penetration scenario)

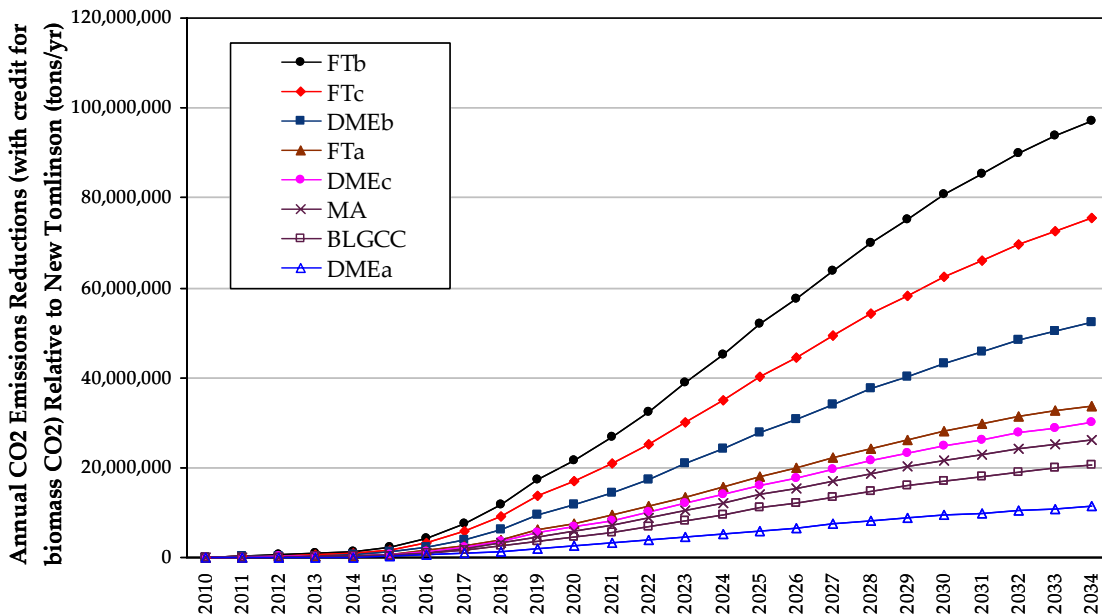

Transportation of the crude FT product to the oil refinery included in FT cases.
 Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 15: Net CO₂ emissions reductions (with credit for biomass CO₂) (Low market penetration scenario)

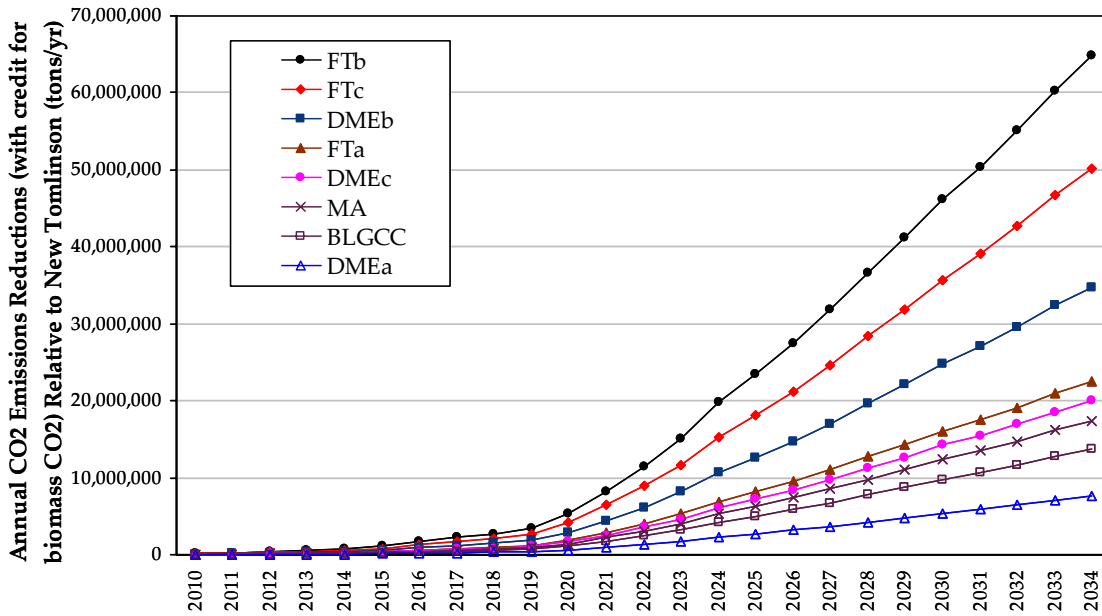


Transportation of the crude FT product to the oil refinery included in FT cases.

Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.

Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.


Figure 16: Net SO₂ emissions reductions (Aggressive market penetration scenario)

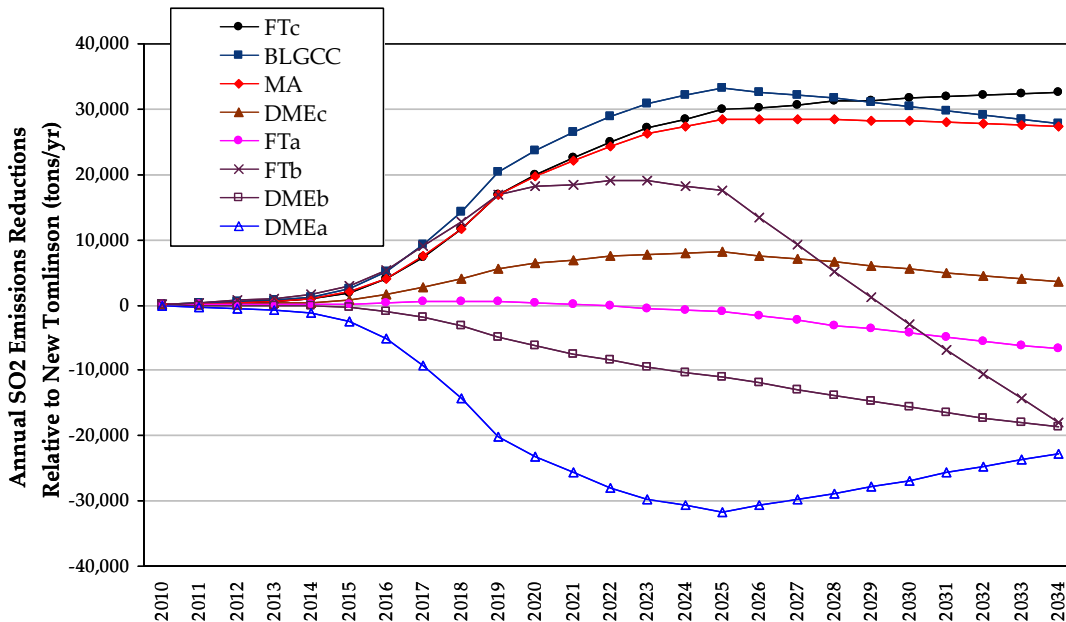

Transportation of the crude FT product to the oil refinery included in FT cases.


Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 17: Net SO₂ emissions reductions (*Base market penetration scenario*)

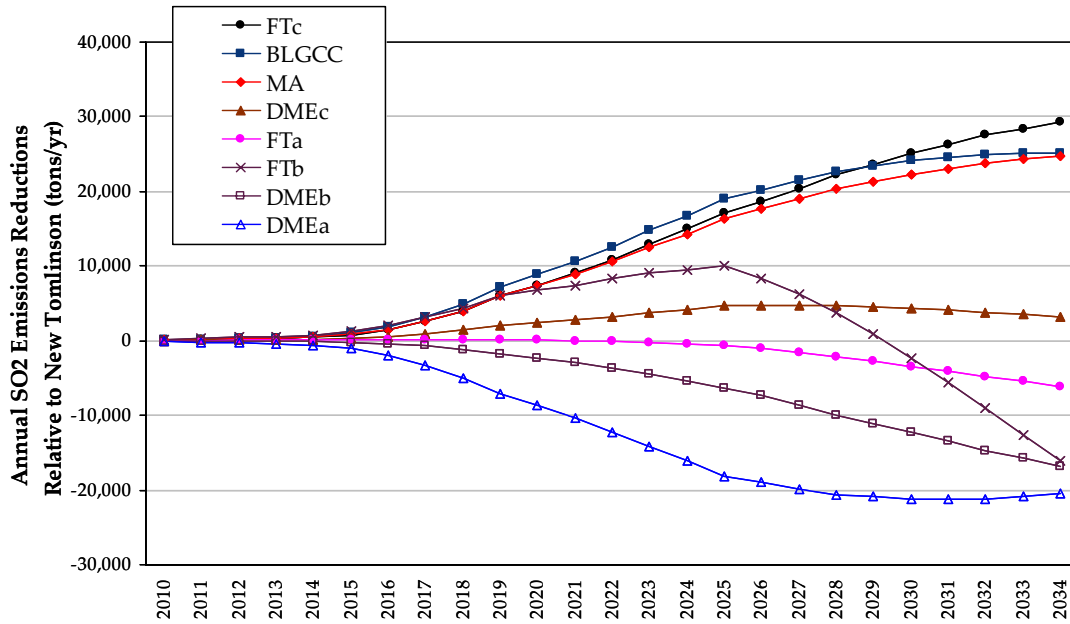


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 18: Net SO₂ emissions reductions (*Low market penetration scenario*)

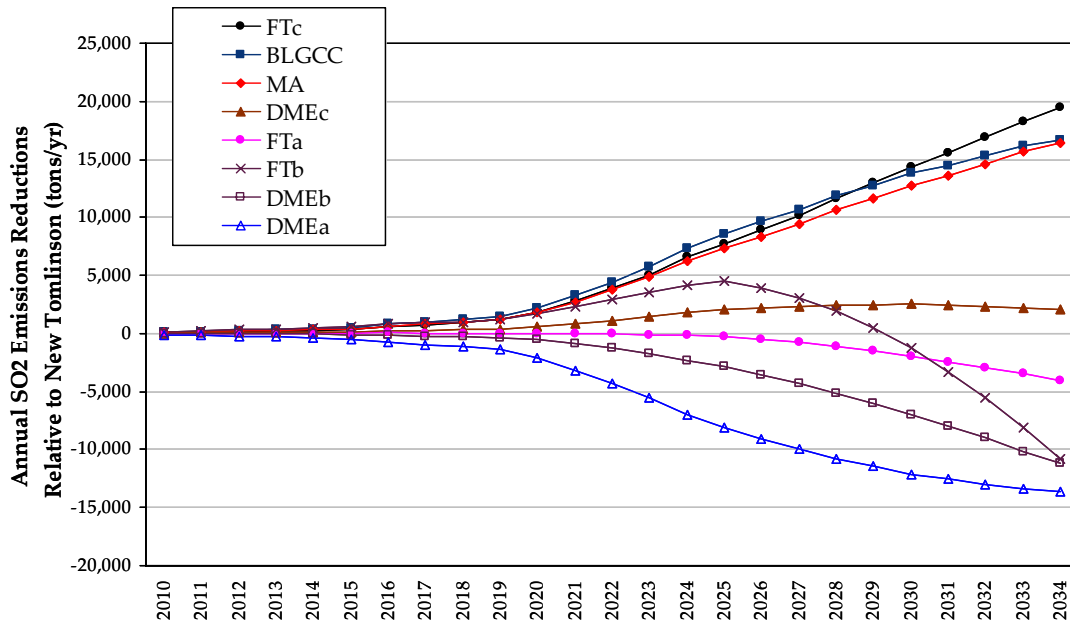


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 19: Net NOx emissions reductions (Aggressive market penetration scenario)

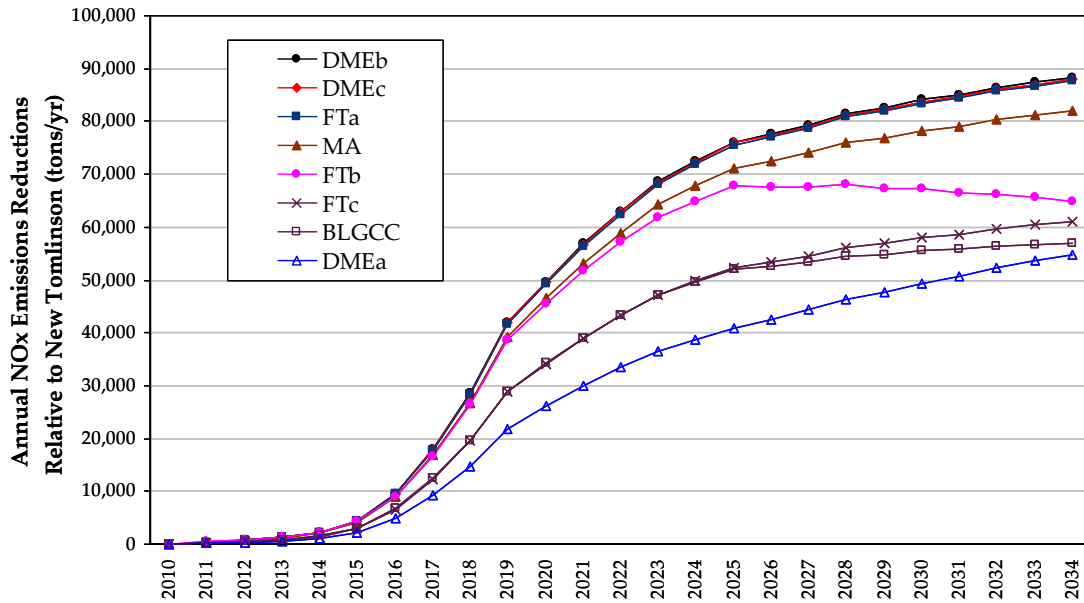


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 20: Net NOx emissions reductions (Base market penetration scenario)

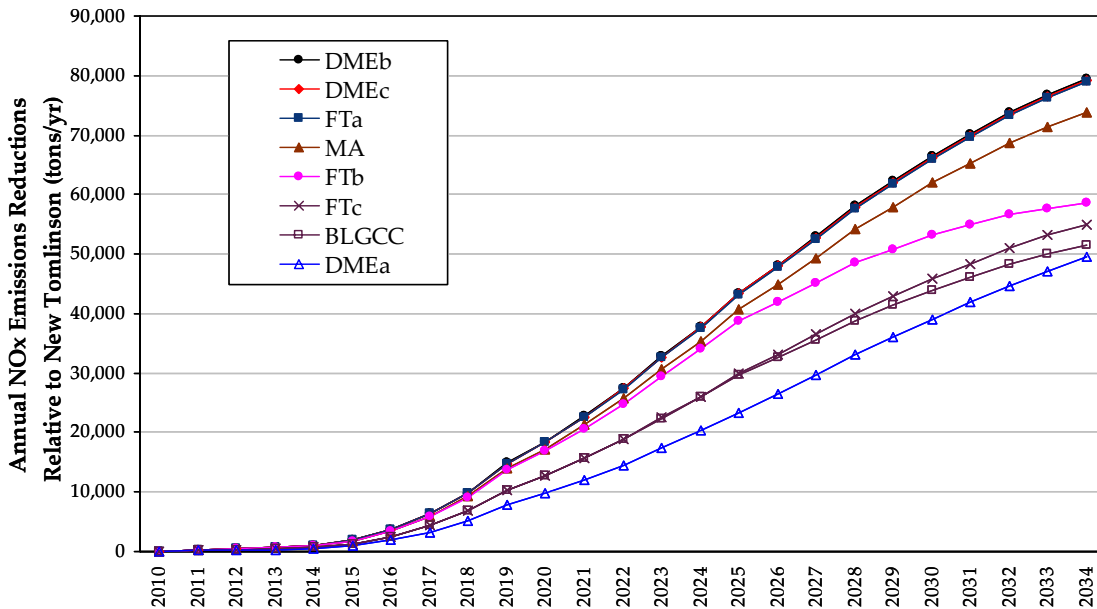


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 21: Net NOx emissions reductions (Low market penetration scenario)

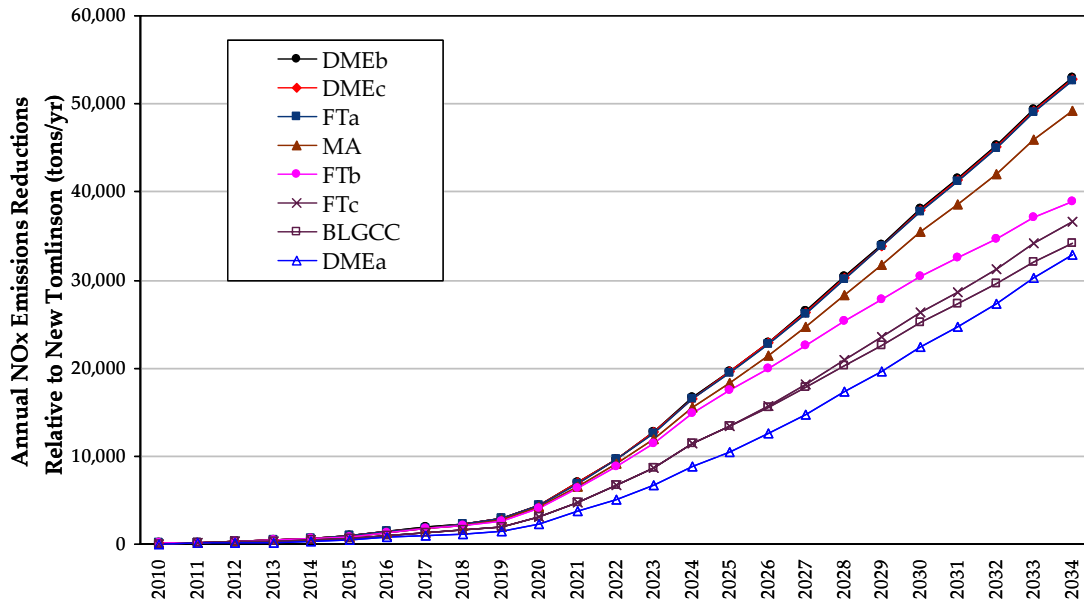


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 22: Net VOC emissions reductions (Aggressive market penetration scenario)

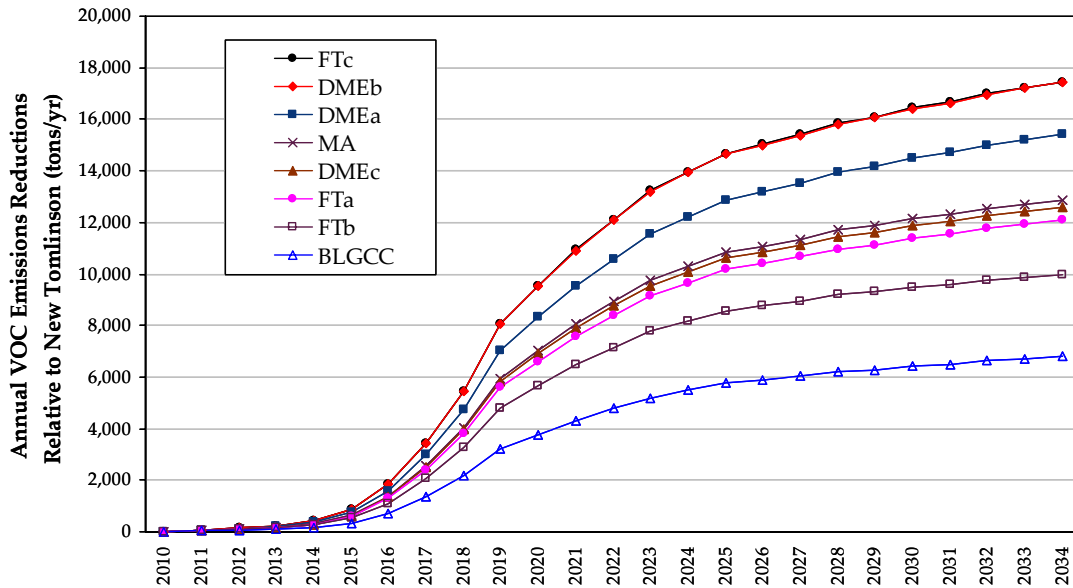


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 23: Net VOC emissions reductions (Base market penetration scenario)

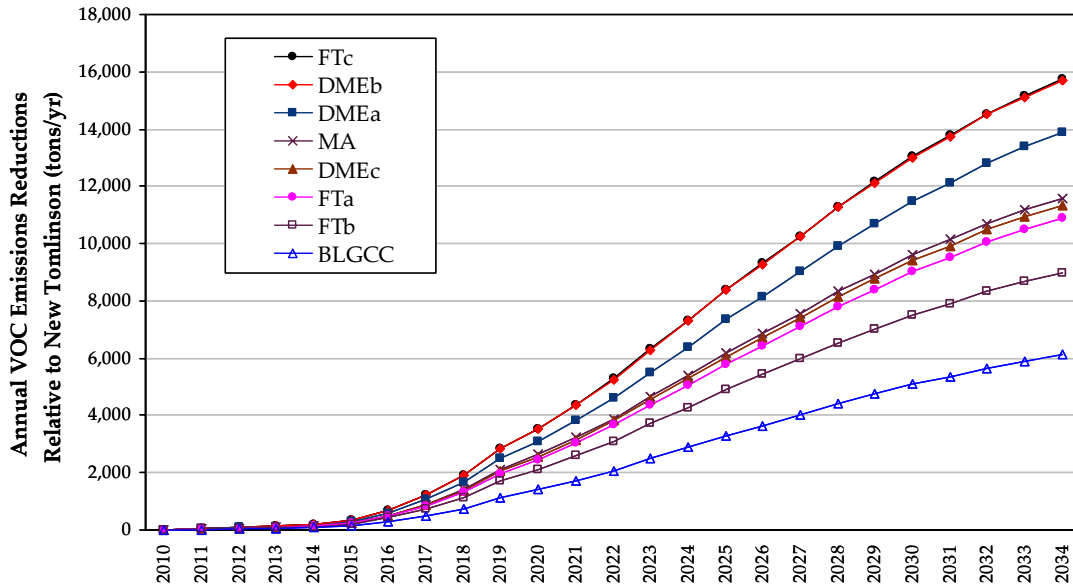


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 24: Net VOC emissions reductions (Low market penetration scenario)

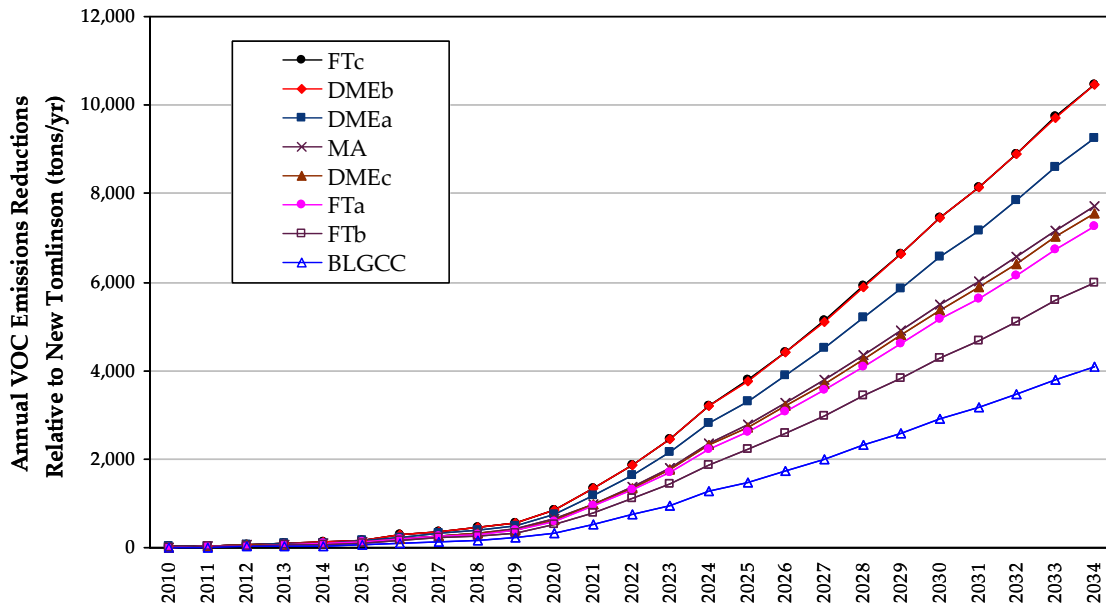


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 25: Net CO emissions reductions (Aggressive market penetration scenario)

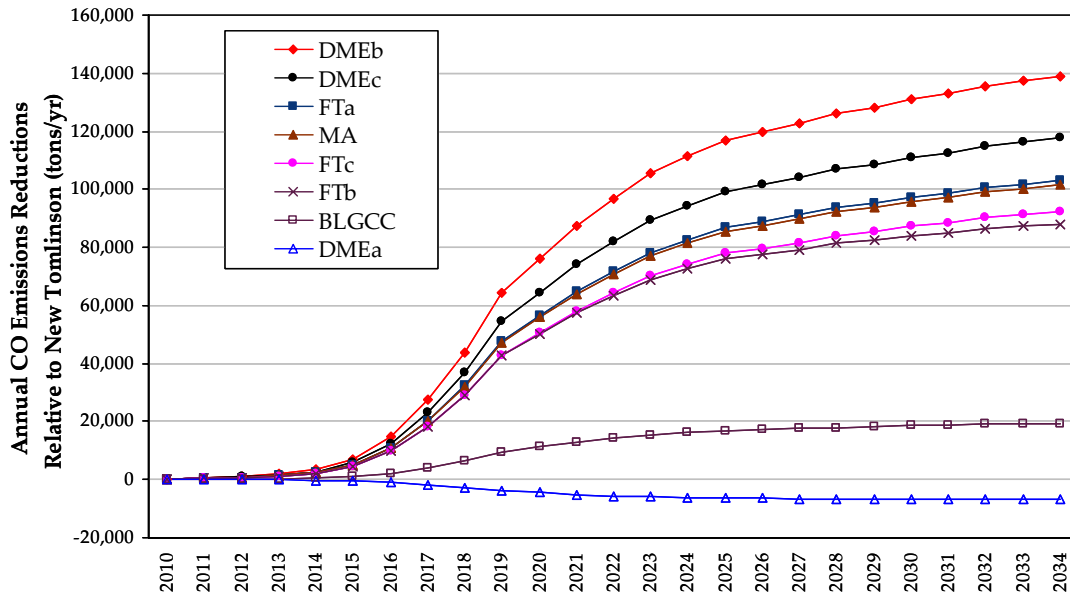


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 26: Net CO emissions reductions (Base market penetration scenario)

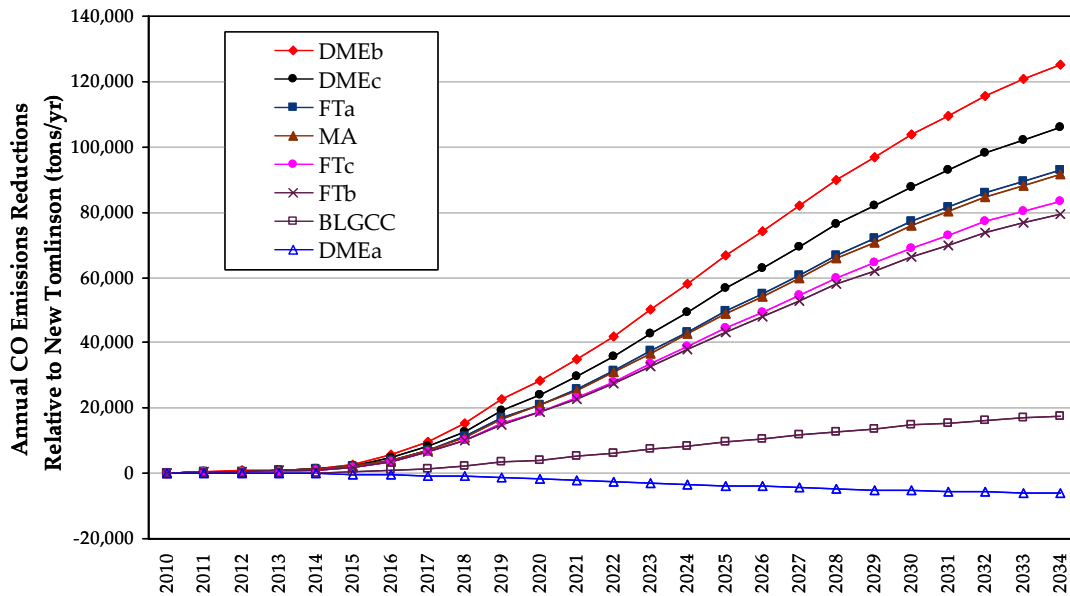


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 27: Net CO emissions reductions (Low market penetration scenario)

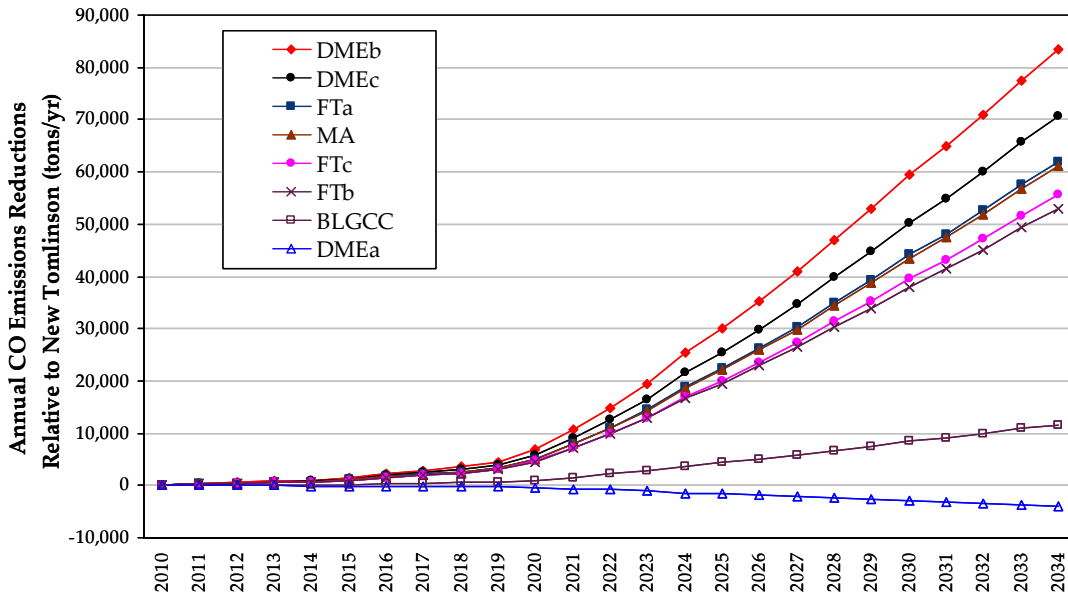


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 28: Net PM10 emissions reductions (Aggressive market penetration scenario)

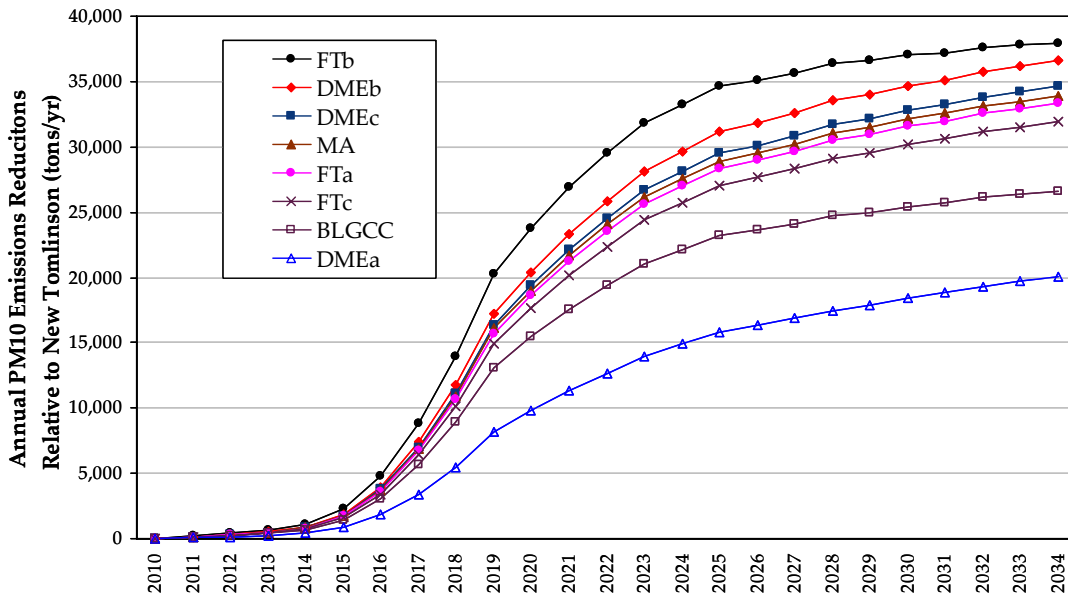


Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 29: PM10 emissions reductions (Base market penetration scenario)

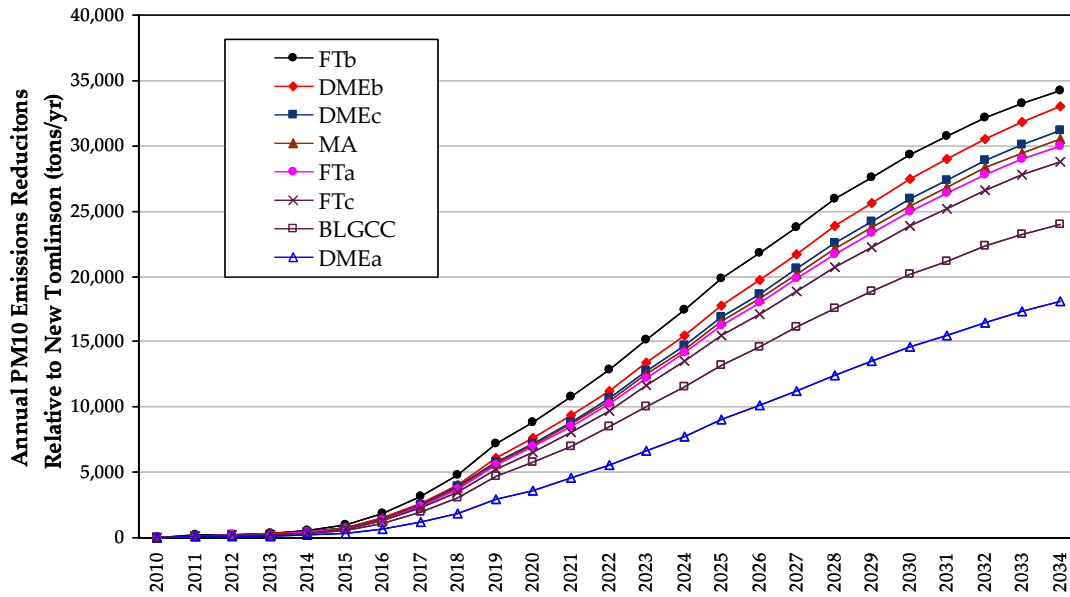

Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.

Figure 30: PM10 emissions reductions (Low market penetration scenario)

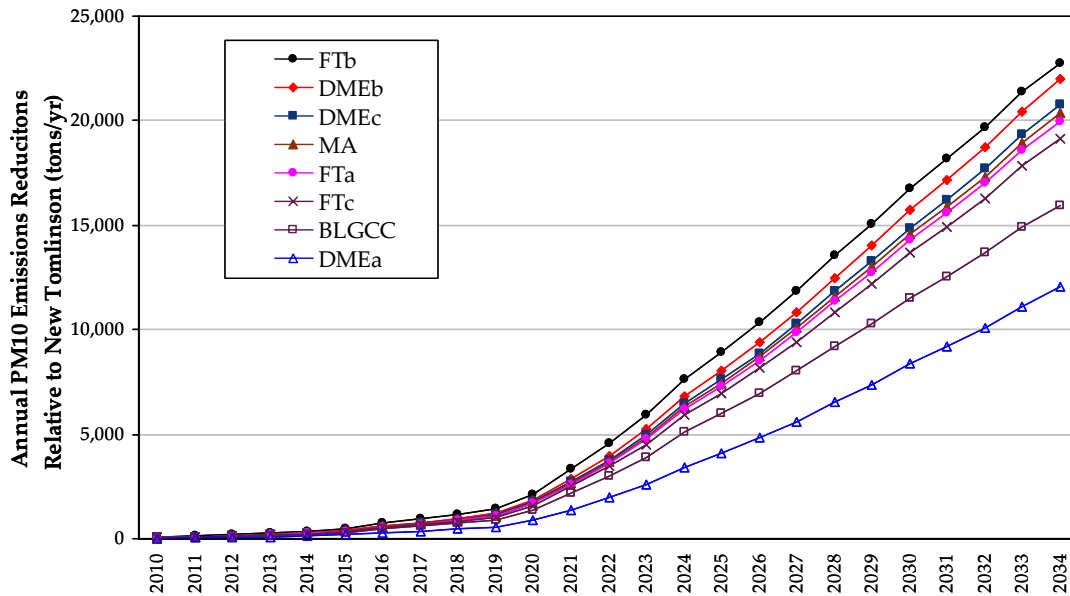

Transportation of the crude FT product to the oil refinery included in FT cases.
 Note on vehicle end use: FT cases assume FT gasoline blend in gasoline engines and FT diesel blend in CIDI engines. MA case assumes low-level blend with gasoline.


6.1 High Level/Low Level Blend Comparison

The preceding national impacts estimates assumed that mixed alcohols and FT biofuels were used in low-level blends with their conventional counterparts, specifically, a 10% blend of mixed alcohols with gasoline and a 10% blend of FT diesel with low-sulfur diesel. However, with some relatively minor engine and vehicle modifications (more so for alcohol fuels than FT fuels) these fuels can also be used in either high-level blends or as neat (100%) biofuels. If used in this manner, certain tailpipe emissions are expected to decrease. However, data are either limited or non-existent regarding light-duty vehicle performance. As discussed in Volume 1, based on a review of the literature, we made estimates of the reductions in certain tailpipe emissions when vehicles are optimized for biofuels usage. Our assumptions in this regard are summarized in Table 20 and Table 21. The major impacts are expected to be:

- VOC emissions: tailpipe VOCs may be further reduced when neat FT diesel is used instead of low-sulfur diesel. Also, evaporative VOC emissions should be lower when mixed alcohols are used in a flex fuel vehicle compared to gasoline vehicles.
- CO emissions: CO may be reduced when neat FT diesel is used instead of low-sulfur diesel.
- There would be modest reductions in SO₂ and possibly NO_x, but these are expected to be minimal.

For the VOC and CO cases, the differences between the low-blend and high blend cases are given in Figure 31 and Figure 32. Only the *Aggressive* market penetration scenario is shown.

Figure 31: Net VOC emissions reductions comparing low-level and high-level blends of mixed alcohols and FT biofuels (*Aggressive* market penetration scenario)

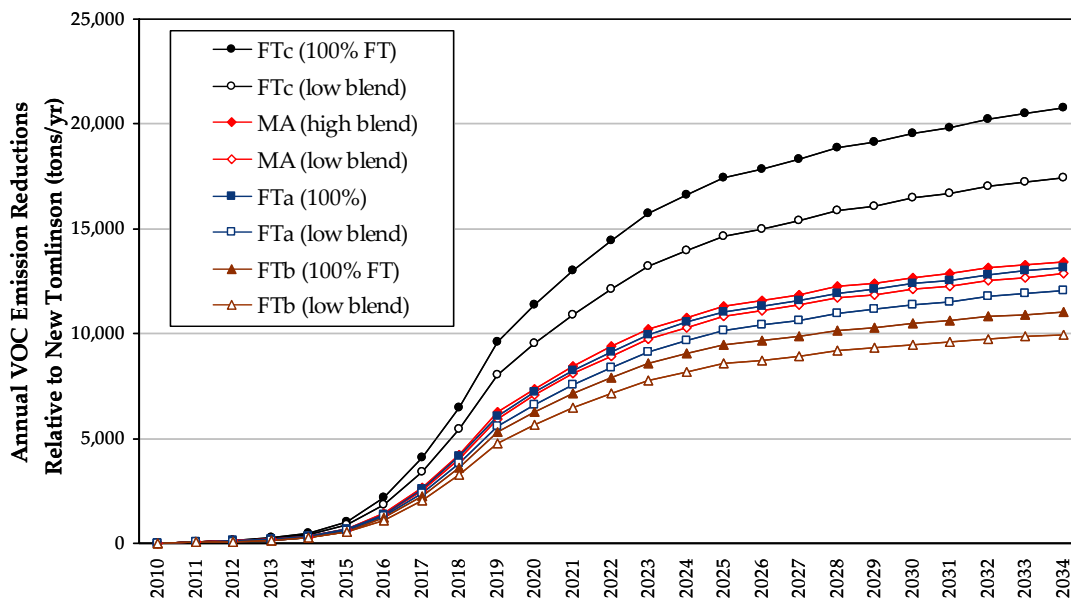


Transportation of the crude FT product to the oil refinery included in FT cases.

Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.

Note on vehicle end use: FT cases assume FT gasoline used in SI engines and FT diesel in CIDI engines. "Low Blend" cases assumes 10% blend with conventional fuels, "high blend" assumes 85% blend of mixed alcohols with conventional gasoline.

Figure 32: Net CO emissions reductions comparing low-level and high-level blends of mixed alcohols and FT biofuels (*Aggressive market penetration scenario*)

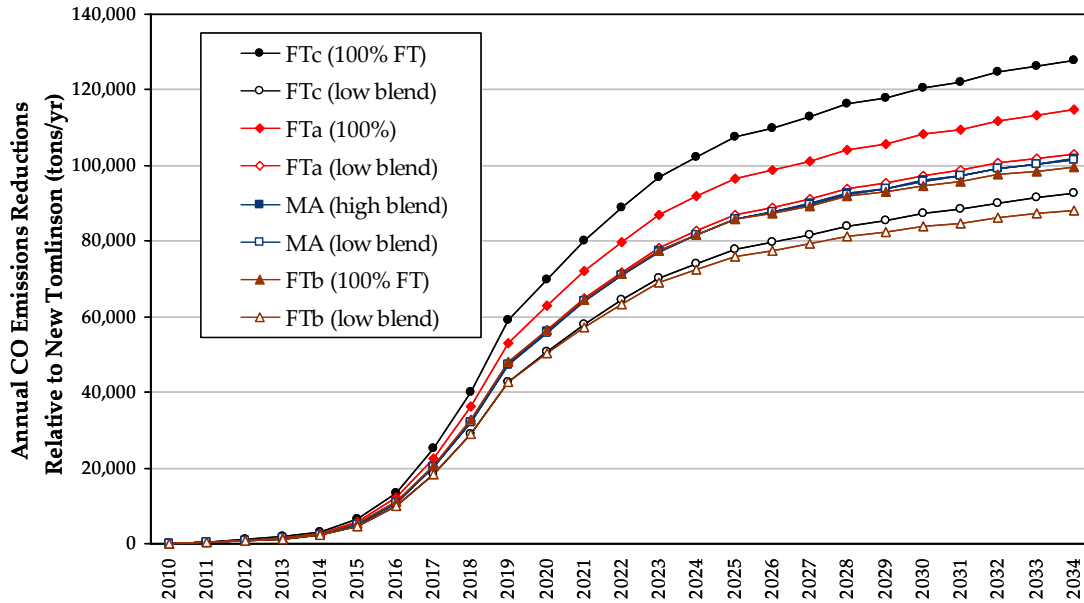

Transportation of the crude FT product to the oil refinery included in FT cases.
 Note: excludes any emissions from land use changes and biomass growth that are not related to harvesting and transportation.
 Note on vehicle end use: FT cases assume FT gasoline used in SI engines and FT diesel in CIDI engines. "Low Blend" cases assumes 10% blend with conventional fuels, "high blend" assumes 85% blend of mixed alcohols with conventional gasoline.

7 References

1. National Council for Air and Stream Improvement, Inc., "An Analysis of Kraft Recovery Furnace NO_x Emissions and Related Parameters." *Technical Bulletin No. 636*. New York, NY: National Council of the Paper Industry for Air and Stream Improvement, Inc., July 1992.
2. National Council for Air and Stream Improvement, Inc., "Calculation Tools for Estimating Greenhouse Gas Emissions from Pulp and Paper Mills. Version 1.0," Research Triangle Park, NC: National Council for Air and Stream Improvement, Inc., December, 2002.
3. National Council for Air and Stream Improvement, Inc., "Compilation of Speciated Reduced Sulfur Compound and Total Reduced Sulfur Emissions Data for Kraft Mill Sources," Technical Bulletin No. 849. Research Triangle Park, NC: National Council for Air and Stream Improvement, Inc., August 2002.
4. National Council for Air and Stream Improvement, Inc., "Performance of EPA Stack Sampling Methods for PM₁₀, PM_{2.5} and Condensable Particulate Matter on Sources Equipped With Electrostatic Precipitators," Technical Bulletin No. 852, Research Triangle Park, NC: National Council for Air and Stream Improvement, Inc., September, 2002.
5. National Council for Air and Stream Improvement, Inc., "Table: Summary of 'Air Toxic' Emissions from NDCE Kraft Recovery Furnaces," Personal facsimile communication from John Pinkerton, December, 2002.
6. National Council for Air and Stream Improvement, Inc., "Sulfur Dioxide and Nitrogen Oxides Emissions from Pulp And Paper Mills In 2000," NCASI Special Report No. 02-06, December 2002.
7. National Council for Air and Stream Improvement, Inc., "Factors Affecting NO_x Emissions from Lime Kilns," Technical Bulletin No. 855, Research Triangle Park, NC: National Council for Air and Stream Improvement, Inc., January 2003.
8. Environmental Protection Agency, AP-42, Compilation of Air Pollutant Emission Factors. Section 1.6: External Combustion Sources, Wood Residue Combustion in Boilers. Research Triangle Park, NC: U.S. Environmental Protection Agency, March 2002.
9. Gasification Technologies Council, "Gasification Offers Significant Environmental and Economic Benefits," accessed at <http://www.gasification.org>, 16 June 2003.
10. Orr, D. and Maxwell, D., "A Comparison of Gasification and Incineration of Hazardous Wastes: Final Report," DCN 99.803931.02. Austin, TX: Radian International, LLC, March 2000.
11. Ratafia-Brown, J.A., Manfredo, L.M., Hoffmann, J.W., and Massood, R. (Science Applications International Inc.) and Gary J. Stiegel (U.S. DOE/National Energy Technology Laboratory), "An Environmental Assessment of IGCC Power Systems," presented at 19th Annual Pittsburgh Coal Conf., September 2002.
12. Simbeck, D., "Future of U.S. Coal-Fired Power Generation: Band-Aids or Corrective Surgery," presented at the Gasification Technologies Conference, San Francisco, October 2002.
13. Simbeck, D., "Process Screening Analysis of Alternative Gas Treating and Sulfur Recovery for Gasification," presented at the Nineteenth Annual Pittsburgh Coal Conf., September 2002.
14. Teco Energy, "Polk Power Station IGCC", DOE/NARUC Clean Coal Technology Forum, 8 December 2002.
15. Ubis, T., Bressan, L. and O'Keefe, L., "The 800 MW PIEMSA IGCC Project," presented at the Gasification Technologies Conference, San Francisco, October 2000.
16. Environmental Protection Agency, AP-42, Compilation of Air Pollutant Emission Factors. Section 3.1: Stationary Gas Turbines. Research Triangle Park, NC: U.S. Environmental Protection Agency, April 2000.
17. Environmental Protection Agency, AP-42, Compilation of Air Pollutant Emission Factors. Section 1.4: External Combustion Sources, Natural Gas Combustion. Research Triangle Park, NC: U.S. Environmental Protection Agency, July 1998.

18. Energy Information Administration, Annual Energy Outlook 2005 with Projections to 2030. DOE/EIA-0383 (2005). Washington, DC: U.S. Dept. of Energy, January, 2005.
19. Energy Information Administration, Annual Energy Outlook 2006, with Projections to 2030, DOE/EIA-0383(2006), U.S. Department of Energy, February 2006.
20. Environmental Protection Agency (EPA). Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2003. EPA 430-R-05-003. Washington, DC: U.S. Environmental Protection Agency, April, 2005.
21. Environmental Protection Agency (EPA), National Emissions Inventory Trends Report, updated July 18, 2005. See also the NEI Air Pollutant Emissions Trends Data at www.epa.gov/ttn/chief/trends.
22. Argonne National Laboratory, "Greenhouse Gases, Regulated Emissions, and Energy Use in Transportation (GREET) Model, version 1.7 (beta), released January 18, 2006.
23. Oguma, M. and Goto, S. "Evaluation of Medium Duty DME Truck Performances - Field Test Results and Trace Level Emissions Measurement." Presented at the 2nd International DME Conference (DME2), London, UK, May 15-17, 2006.
24. Delucchi, Mark, Institute for Transportation Studies, UC Davis, A Lifecycle Emissions Model (LEM): Lifecycle Emissions from Transportation Fuels, Motor Vehicle, Transportation Modes, Electricity Use, Heating and Cooking Fuels, and Materials, Documentation of methods and data, UCD-ITS-RR-03-17, Main Report, December, 2003
25. Gilshannon, S.T. and Brown, D.R., Review of Methods for Forecasting the Market Penetration of New Technologies, Pacific Northwest National Laboratory, December 1996.
26. Fisher, J.C. and Pry, R.H., "A Simple Substitution Model of Technological Change," Technological Forecasting and Social Change, 3:75-88, 1971.
27. Homer, G. Air Liquide, personal communication, 31 January 2006.
28. American Forest & Paper Association, personal communication from Elizabeth Davies, 22 May 2006.